



**Art.-Nr: KSC519CC-SW**

**Exit sign, Emergency light Centralised power supply systems  
Universal, CoreCompact 24 (CC), CPS, 22 m, IP54,  
Polycarbonate, Black**

Innovative plastic emergency exit sign and safety luminaire for universal mounting. Suited to inscription on one or two sides, as well as illumination of firefighting and first aid stations, with the 5 lux rating required as a minimum according to EN 1838.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information

[www.rp-group.com/en/item/KSC519CC-SW](http://www.rp-group.com/en/item/KSC519CC-SW)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign, Emergency light       |
| Mounting               | Universal                        |
| Recognition distance   | 22 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Polycarbonate                    |
| Housing color          | Black                            |
| Protection type (IP)   | IP54                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | CoreCompact 24 (CC)              |



|   |                             |
|---|-----------------------------|
| Bridging time                           | CPS                         |
| Battery                                 | /                           |
| Operating mode                          | Non-maintained / maintained |
| Input voltageAC                         | 24 V                        |
| Power max.                              | 2,1 W                       |
| Power maintained                        | 2,1 W                       |
| Power non-maintained                    | 0,4 W                       |
| Ambient temperature maintained mode     | -10 °C to 40 °C             |
| Ambient temperature non-maintained mode | -10 °C to 40 °C             |
| Depth                                   | 34 mm                       |
| Width                                   | 250 mm                      |
| Height                                  | 174 mm                      |
| Weight                                  | 0.56                        |
| Weight incl. packaging                  | 0.64                        |
| Connection cross-section                | 2.5 mm <sup>2</sup>         |
| Switching input                         | No                          |
| Emergency light blocking                | No                          |
| Battery connection                      | No                          |
| Dimming function                        | Yes                         |
| Customs tariff number                   | 94056120                    |
| EAN                                     | 4260766550294               |



## TECHNICAL DRAWING

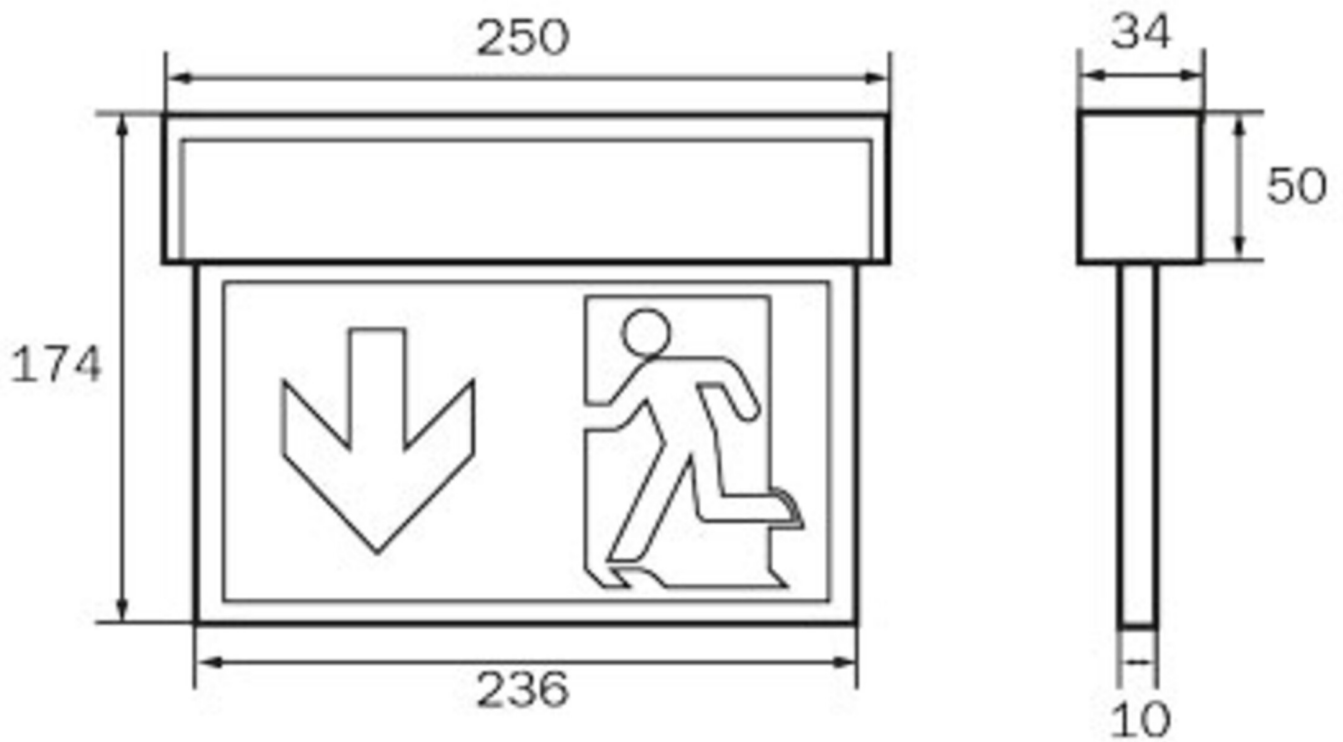

## ACCESSORY LIST

- DSA - Wire suspension
- AWKSU - Wall bracket
- 2PW-EB - Pendant
- KMBE - Concrete-mounted box
- BALLPLX-KMU - Wire mesh surround
- KS4FIRE -
- KS4HELP -



## RELATED PRODUCTS

| Art.-No.    | Image   | Monitoring                | Supply               | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|-------------|---|---------------------------|----------------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KSC019-SW   |  | Without monitoring        |                      | RAL 9005 |            |               |                   |                    |                  |                             |
| KSC019ML-SW |  | Central power supply (ML) | Central power supply | RAL 9005 | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| KSC019ML    |  | Central power supply (ML) | Central power supply | RAL 9003 | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| KSC519CC    |  | CoreCompact 24 (CC)       | Central power supply | RAL 9003 | €€         | Yes           | low               | Yes                |                  | central                     |

As of: 29.04.2025 - Subject to technical changes and errors.