



## Exit sign Art.-No.: KSU003

Innovative polycarbonate edge LED luminaire for universal mounting. The installation using only 3 parts is kept simple.

Applicable for maintained or non-maintained operation mode. The toolless change and variable use of the pictograms provide planning security.

Universal pictogram set (left, right, up, down) included. Exit sign according to EN 60598-1, EN 605982-22 and EN 1838 norms.




### TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Viewing distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9003
Mechanical rating IP	54
Impact resistance IK	≥ 3
Protection class	2
Supply	Single battery
Monitoring	None
Operation time	3 h
Battery	4,8V/0,5Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 Hz
Input Voltage DC	- V
Power consumption max.	3,1 W
Power consumption maintained	3,1 W
Power consumption non-maintained	1,4 W
Ambient temperature maintained mode	-5 °C / 35 °C
Ambient temperature non-maintained mode	-5 °C / 35 °C
Length	34 mm



Width	250 mm
Height	174 mm
Weight	0.71 kg
Weight incl. Packaging	0.79 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Plug
Dimming function	No
Customs tariff number	94056120
Coutry of origin	Germany
EAN	4260349823999

## TECHNICAL DRAWING

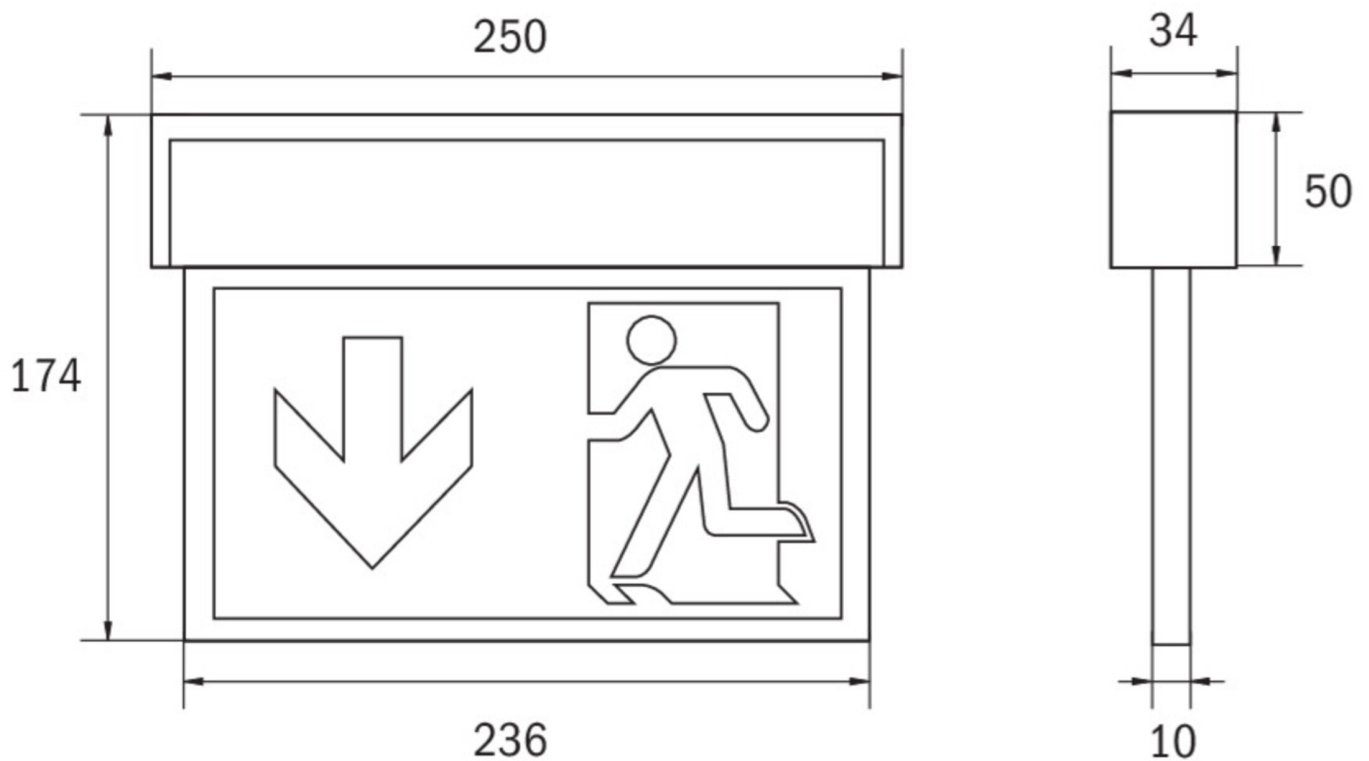



## ACCESSORIES

KME-EB	- KM recessed frame with test button (SB)
AWKSU	- Wall bracket short 60x47mm, white
2PW-EB	-
KMBE	- concrete recessed housing
BALLPLX-KMU	- Ball protection 380x280x60mm incl. fastening
DSA	- cord suspension set 1,5m
KSE-MB-WS	- Mounting frame with metal cover to
KSE-MB-SI	- Mounting frame with metal cover to