



## Exit sign

**Art.-No.: KSU011WL**

Innovative polycarbonate edge LED luminaire for universal mounting. The installation using only 3 parts is kept simple.

Applicable for maintained or non-maintained operation mode. The toolless change and variable use of the pictograms provide planning security.

Universal pictogram set (left, right, up, down) included. Exit sign according to EN 60598-1, EN 605982-22 and EN 1838 norms.




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Viewing distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9003
Mechanical rating IP	54
Impact resistance IK	≥ 3
Protection class	2
Supply	Single battery
Monitoring	WL - Wireless Professional
Operation time	1 h
Battery	3.2V / 3.3 Ah LiFePO4
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	5,3 W
Power consumption maintained	3,9 W
Power consumption non-maintained	1,5 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	34 mm



Width	250 mm
Height	174 mm
Weight	0.7 kg
Weight incl. Packaging	0.78 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Plug
Dimming function	No
Luminous flux mains mode	190 lm
Luminous flux emergency mode	190 lm
Customs tariff number	94056120
Country of origin	Germany
EAN	4260581711146

## TECHNICAL DRAWING

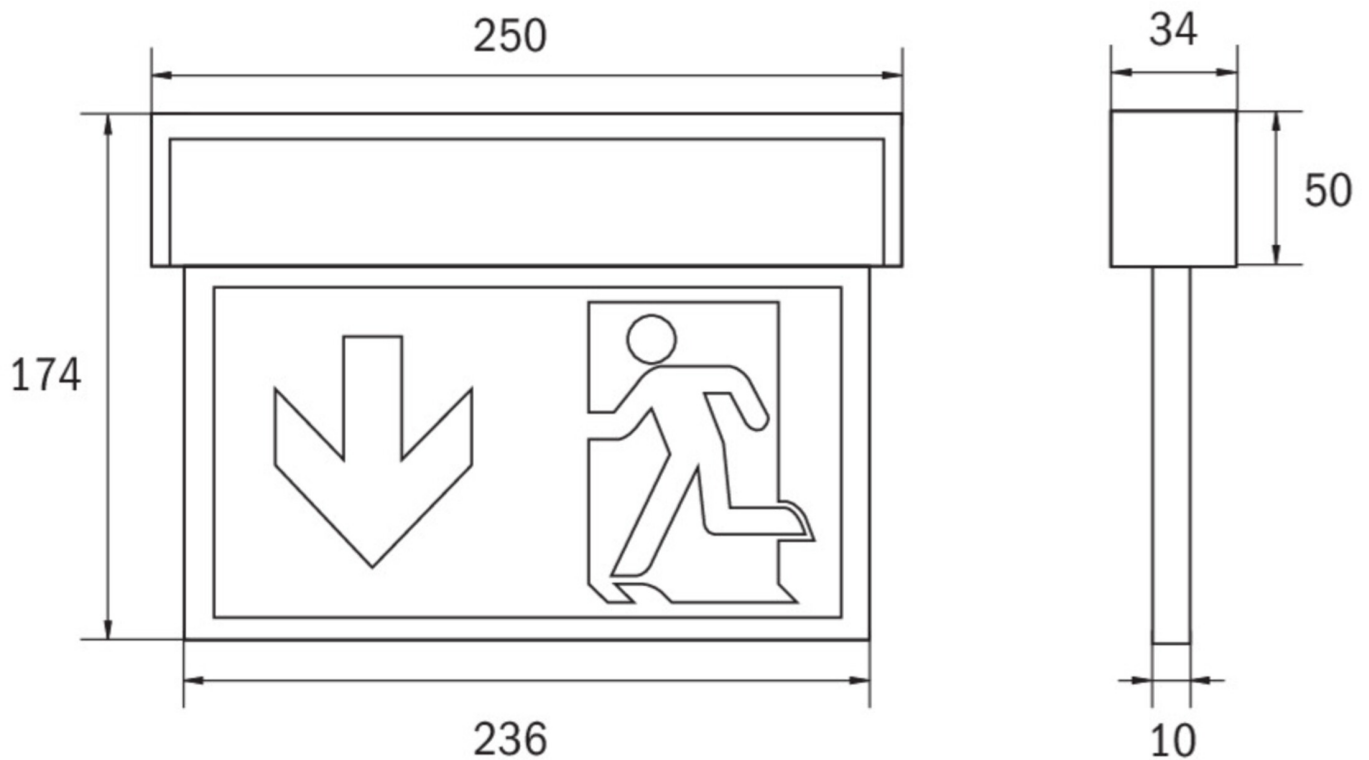



## ACCESSORIES

KME-EB	- KM recessed frame with test button (SB)
AWKSU	- Wall bracket short 60x47mm, white
2PW-EB	-
KMBE	- concrete recessed housing
BALLPLX-KMU	- Ball protection 380x280x60mm incl. fastening
DSA	- cord suspension set 1,5m
KSE-MB-WS	- Mounting frame with metal cover to
KSE-MB-SI	- Mounting frame with metal cover to