



Art.-Nr: KWID013SC Exit sign Single Battery Recessed mounting, SelfControl (SC), 3 h, 16 m, IP65, Plastic, white

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for ceiling mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/KWID013SC



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Supply	Single Battery
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V






Input frequency	50 / 60 Hz				
Power max.	6,17 W				
Power maintained	4,6 W				
Power non-maintained	0,35 W				
Ambient temperature maintained mode	-5 °C to 35 °C				
Ambient temperature non-maintained mode	-5 °C to 35 °C				
Depth	93 mm				
Width	390 mm				
Height	139 mm				
Weight	0.89				
Weight incl. packaging	0.99				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Luminous flux mains	300 lm				
Luminous flux emergency	230 lm				
Customs tariff number	94056120				
EAN	4260659566241				





TECHNICAL DRAWING

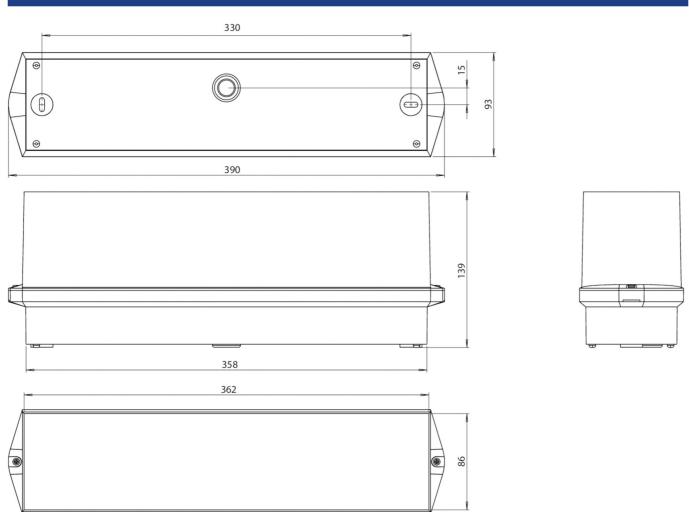

ACCESSORY LIST

BKW -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KWID013SC- COOLIP54	() () () () () () () () () ()	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KWID413WL	()	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 07.02.2025 - Subject to technical changes and errors.