



Art.-Nr: KWID029ML

**Exit sign, Safety luminaire Centralised power supply systems
Recessed mounting, Central power supply (ML), CPS, 16 m,
IP65, Plastic, white**

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for ceiling mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/KWID029ML



TECHNICAL DATA


| | |
|------------------------|---|
| Luminaire type | Exit sign, Safety luminaire |
| Mounting | Recessed mounting |
| Recognition distance | 16 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE, D-Sign, TÜV Rheinland Type approved, ENEC |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltageAC | 230 V |



| | |
|---|---------------------|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 5,2 W |
| Power maintained | 5,2 W |
| Power non-maintained | 1,1 W |
| Ambient temperature maintained mode | -30 °C to 40 °C |
| Ambient temperature non-maintained mode | -20 °C to 40 °C |
| Depth | 93 mm |
| Width | 390 mm |
| Height | 139 mm |
| Weight | 0.8 |
| Weight incl. packaging | 0.9 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 520 lm |
| Luminous flux emergency | 520 lm |
| Customs tariff number | 94056120 |
| EAN | 4260659566319 |



TECHNICAL DRAWING

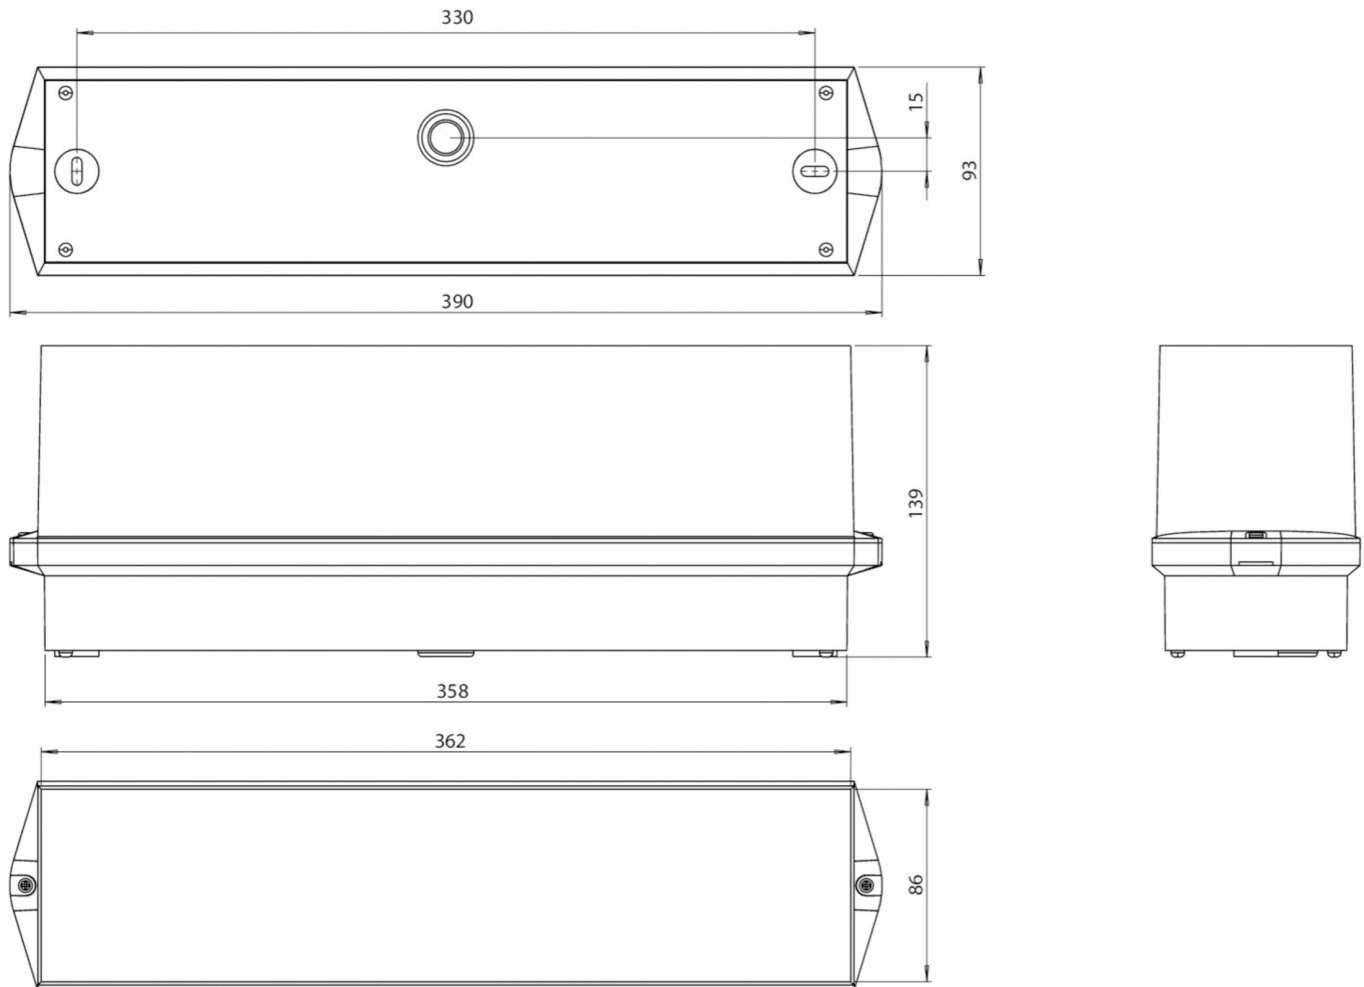

ACCESSORY LIST

BKW -

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|-----------|-------|---------------------|----------------------|----------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
| KWID529CC | | CoreCompact 24 (CC) | Central power supply | RAL 9003 | €€ | Yes | low | Yes | | central |

As of: 07.02.2025 - Subject to technical changes and errors.