



Art.-Nr: KWID039ML

Exit sign, Safety luminaire Centralised power supply systems Recessed mounting, Central power supply (ML), CPS, 16 m, IP65, Plastic, white

Classic bar-shaped polycarbontate luminaire for ceiling mounting. Straight lines as well as the robust construction with a high ingress protection allow versatile use.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.









More information www.rp-group.com/en/item/KWID039ML



TECHNICAL DATA

Luminaire type	Exit sign, Safety luminaire				
Mounting	Recessed mounting				
Recognition distance	16 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Plastic				
Housing color	white				
Protection type (IP)	IP65				
Impact resistance (IK)	6				
Certification	WEEE, CE, D-Sign, TÜV Rheinland Type approved, ENEC				
Insulation class	2				
Supply	Centralised power supply systems				
Monitoring	Central power supply (ML)				
Bridging time	CPS				
Battery	/				
Operating mode	single luminaire switching				
Input voltageAC	230 V				
Input frequency	50 / 60 Hz				
Input voltage DC	216 V				







Power max.	9,7 W				
Power maintained	9,7 W				
Power non-maintained	1,1 W				
Ambient temperature maintained mode	-35 °C to 40 °C				
Ambient temperature non-maintained mode	-20 °C to 40 °C				
Depth	93 mm				
Width	390 mm				
Height	139 mm				
Weight	0.77				
Weight incl. packaging	0.87				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	No				
Battery connection	No				
Dimming function	Yes				
Luminous flux mains	1050 lm				
Luminous flux emergency	1050 lm				
Customs tariff number	94056120				
EAN	4260659566333				






TECHNICAL DRAWING

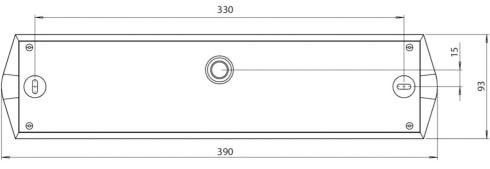

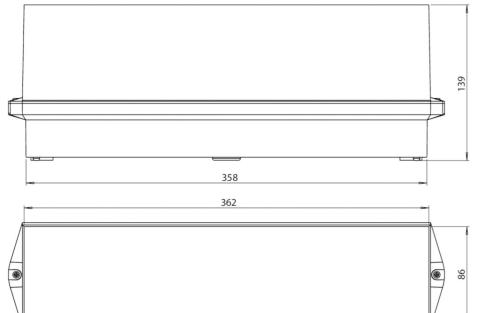



ACCESSORY LIST

BKW -

RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log		Remote main-	max. luminai-	Single luminai-	
							level	tenance	res	re monitoring	

As of: 07.02.2025 - Subject to technical changes and errors.