



Art.-Nr: KWID413WL-TT-OP

Exit sign, Emergency light Self-contained

Wall mounting, Wireless Professional (WL), 3 h, 16 m, IP65, Polycarbonate, White

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire.

Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/KWID413WL-TT-OP



TECHNICAL DATA


| | |
|------------------------|-----------------------------|
| Luminaire type | Exit sign, Emergency light |
| Mounting | Wall mounting |
| Recognition distance | 16 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | CE, WEEE, D-Sign |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 3 h |
| Battery | LiFePO4 3,2 V/1,6 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |



| | |
|---|---------------------|
| Input frequency | 50 Hz |
| Power max. | 5,3 W |
| Power maintained | 4,3 W |
| Power non-maintained | 0,7 W |
| Ambient temperature maintained mode | -5 °C to 35 °C |
| Ambient temperature non-maintained mode | -5 °C to 35 °C |
| Depth | 93 mm |
| Width | 390 mm |
| Height | 139 mm |
| Weight | 0.82 |
| Weight incl. packaging | 0.92 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Luminous flux mains | 305 lm |
| Luminous flux emergency | 180 lm |
| Customs tariff number | 94056120 |



TECHNICAL DRAWING

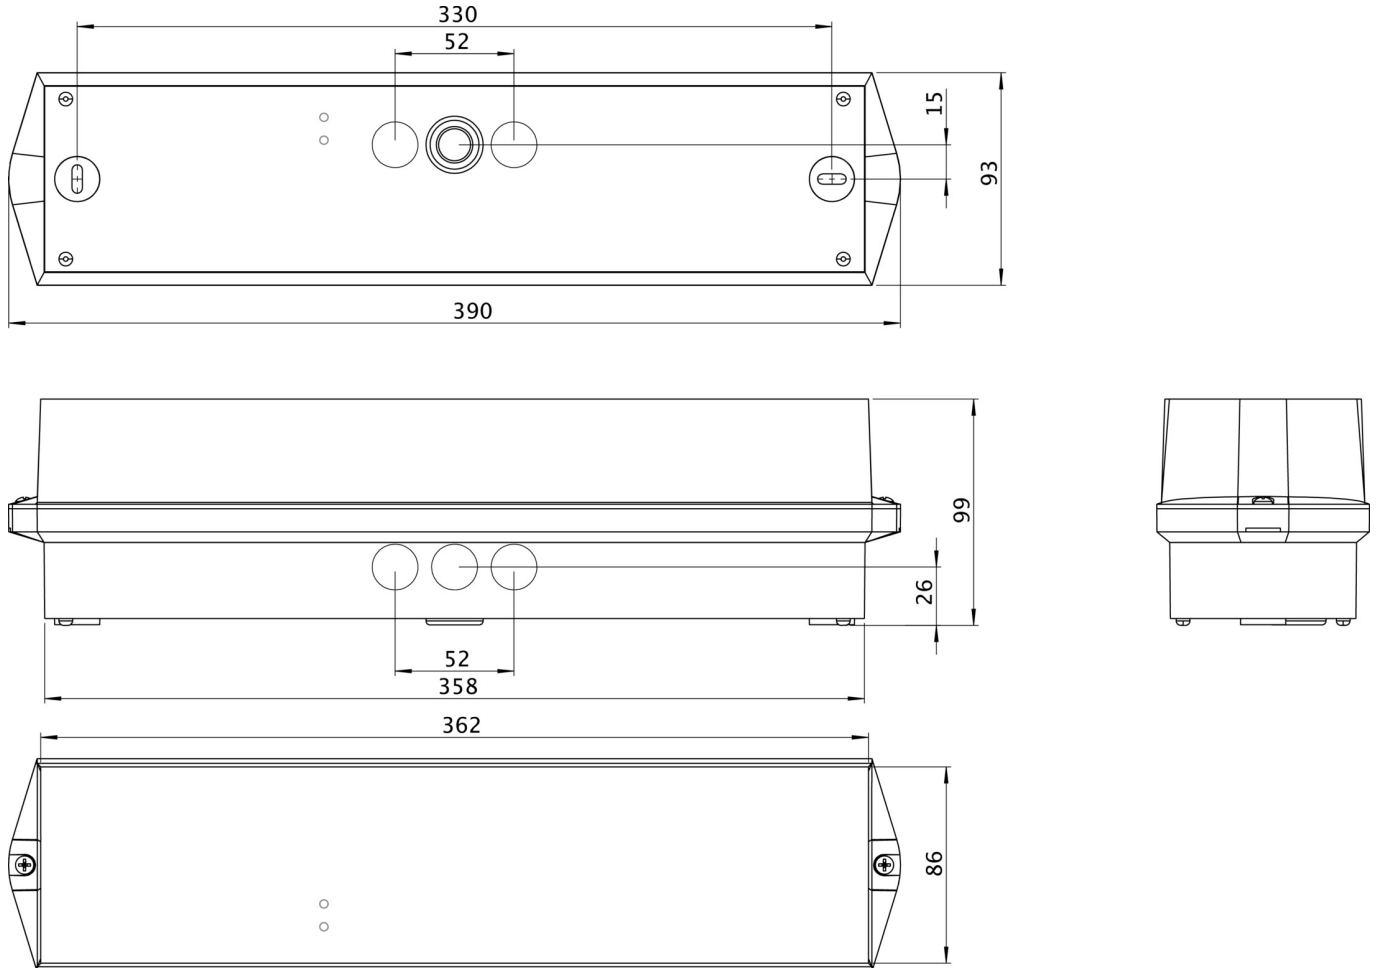

ACCESSORY LIST

BKW -

As of: 09.10.2025 - Subject to technical changes and errors.