



Art.-Nr: KWIW019ML

Exit sign, Safety luminaire Centralised power supply systems Wall mounting, Central power supply (ML), CPS, 16 m, IP65, Plastic, white

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.













TECHNICAL DATA

Luminaire type	Exit sign, Safety luminaire
Mounting	Wall mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign, TÜV Rheinland Type approved, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltageAC	230 V







Input frequency	50 / 60 Hz			
Input voltage DC	216 V			
Power max.	5,2 W			
Power maintained	5,2 W			
Power non-maintained	1,1 W			
Ambient temperature maintained mode	-30 °C to 40 °C			
Ambient temperature non-maintained mode	-20 °C to 40 °C			
Depth	86 mm			
Width	390 mm			
Height	99 mm			
Weight	0.67			
Weight incl. packaging	0.77			
Connection cross-section	2.5 mm²			
Switching input	Yes			
Emergency light blocking	No			
Battery connection	No			
Dimming function	Yes			
Luminous flux mains	335 lm			
Luminous flux emergency	335 lm			
Customs tariff number	94056120			
EAN	4260659566388			





TECHNICAL DRAWING

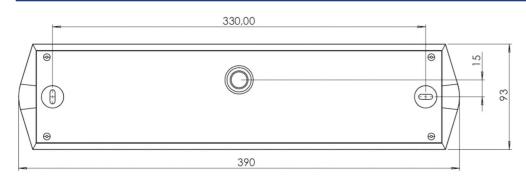

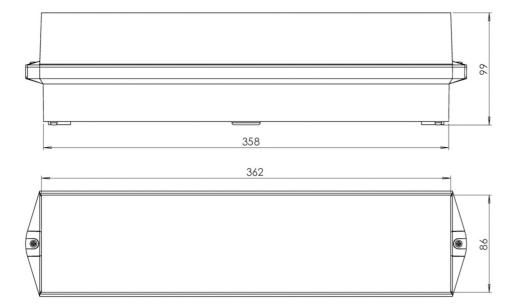



ACCESSORY LIST

BKW -

RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KWIW519CC		CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central

As of: 07.02.2025 - Subject to technical changes and errors.