



Art.-Nr: KWIW029

**Emergency light Centralised power supply systems
Universal, Without monitoring, CPS, , IP65, Polycarbonate,
White**

Classic bar-shaped polycarbonate luminaire for wall or ceiling mounting. Straight lines as well as the robust construction with a high ingress protection allow versatile use.

The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

www.rp-group.com/en/item/KWIW029



TECHNICAL DATA


| | |
|------------------------|---|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE, D-Sign, TÜV Rheinland Type approved, ENEC |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Without monitoring |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Permanent circuit |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 100-254 V |
| Power max. | 4,6 W |
| Power maintained | 4,6 W |



| | |
|---|---------------------|
| Power non-maintained | 0 W |
| Ambient temperature maintained mode | -20 °C to 40 °C |
| Ambient temperature non-maintained mode | -20 °C to 40 °C |
| Depth | 86 mm |
| Width | 390 mm |
| Height | 99 mm |
| Weight | 0.67 |
| Weight incl. packaging | 0.77 |
| Connection cross-section | 1.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 520 lm |
| Luminous flux emergency | 520 lm |
| Customs tariff number | 94056120 |
| EAN | 4260659566418 |



TECHNICAL DRAWING

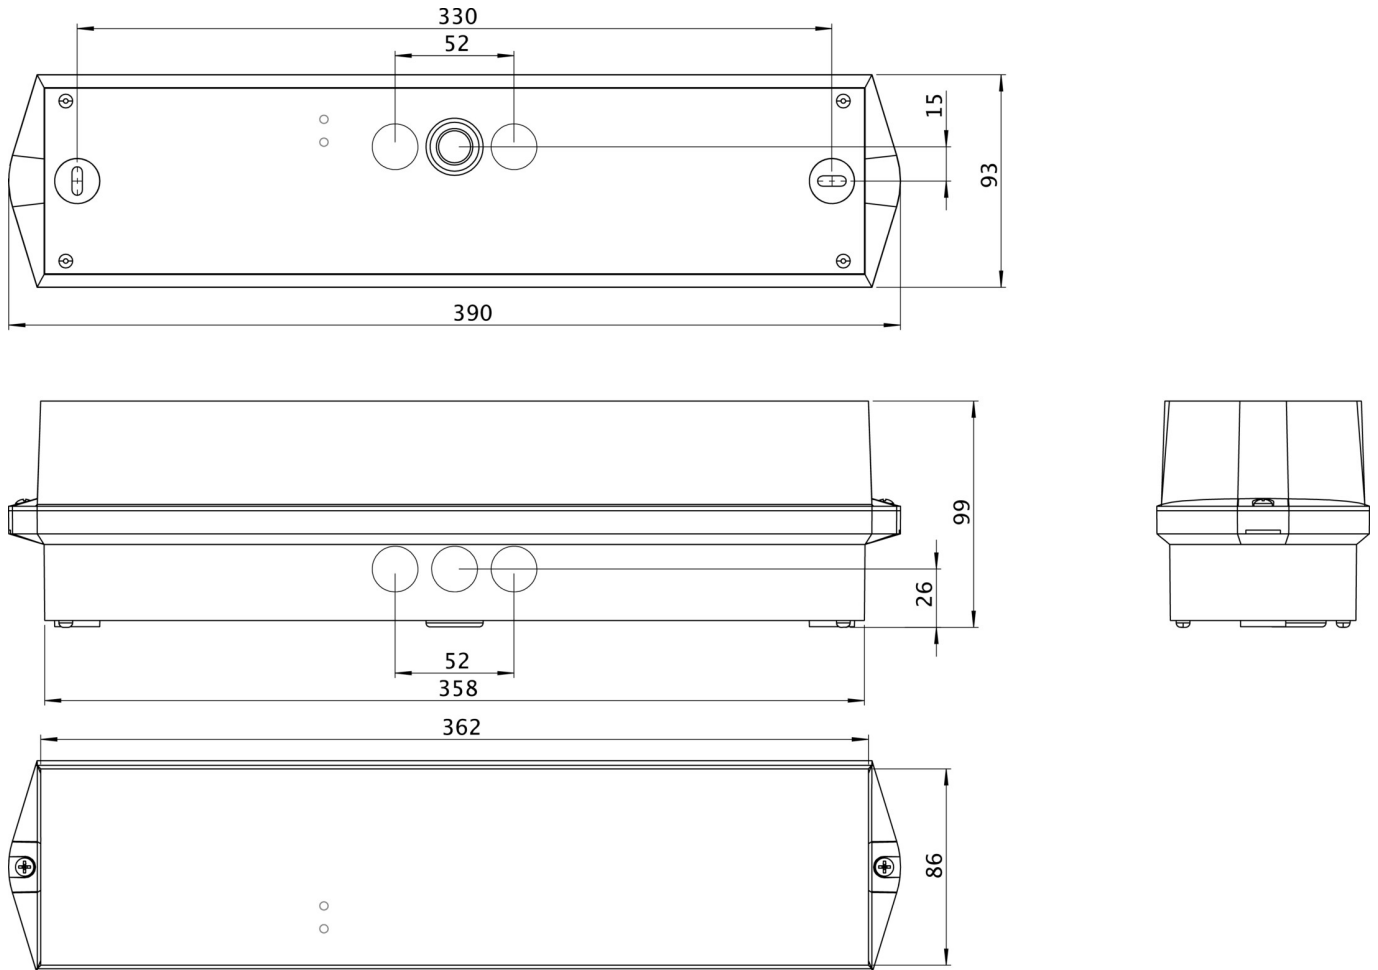

ACCESSORY LIST

BKW -

As of: 29.04.2025 - Subject to technical changes and errors.