



Art.-Nr: KWIW413WL Exit sign, Safety luminaire Single Battery Wall mounting, Wireless Professional (WL), 3 h, 16 m, IP65, Plastic, white

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.







More information www.rp-group.com/en/item/KWIW413WL



TECHNICAL DATA

Luminaire type	Exit sign, Safety luminaire
Mounting	Wall mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 6,4 V/
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V







Input frequency	50 Hz			
Power max.	5,3 W			
Power maintained	4,3 W			
Power non-maintained	0,7 W			
Ambient temperature maintained mode	-5 °C to 35 °C			
Ambient temperature non-maintained mode	-5 °C to 35 °C			
Depth	86 mm			
Width	390 mm			
Height	99 mm			
Weight	0.82			
Weight incl. packaging	0.92			
Connection cross-section	2.5 mm²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Luminous flux mains	305 lm			
Luminous flux emergency	180 lm			
Customs tariff number	94056120			
EAN	4260766550423			





TECHNICAL DRAWING

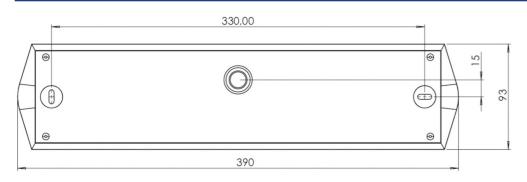

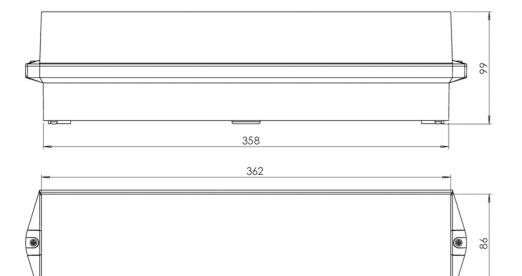



ACCESSORY LIST

BKW -





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KWIW013SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KWIW013SC- COOLIP54		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself

As of: 11.02.2025 - Subject to technical changes and errors.