



Art.-Nr: KWIW418SC-TT
Exit sign, Emergency light
Wall mounting, SelfControl (SC), , 16 m, IP65, Polycarbonate,
White

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/KWIW418SC-TT




TECHNICAL DATA

Luminaire type	Exit sign, Emergency light
Mounting	Wall mounting
Recognition distance	16 m
Pictograph	Set
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty, D-Sign
Insulation class	2
Monitoring	SelfControl (SC)
Battery	/
Ambient temperature maintained mode	-15 °C to 35 °C
Ambient temperature non-maintained mode	-15 °C to 35 °C
Depth	86 mm
Width	390 mm
Height	99 mm



Weight	0.6
Weight incl. packaging	0.7
Customs tariff number	94056120
GTIN	4262483022856

TECHNICAL DRAWING

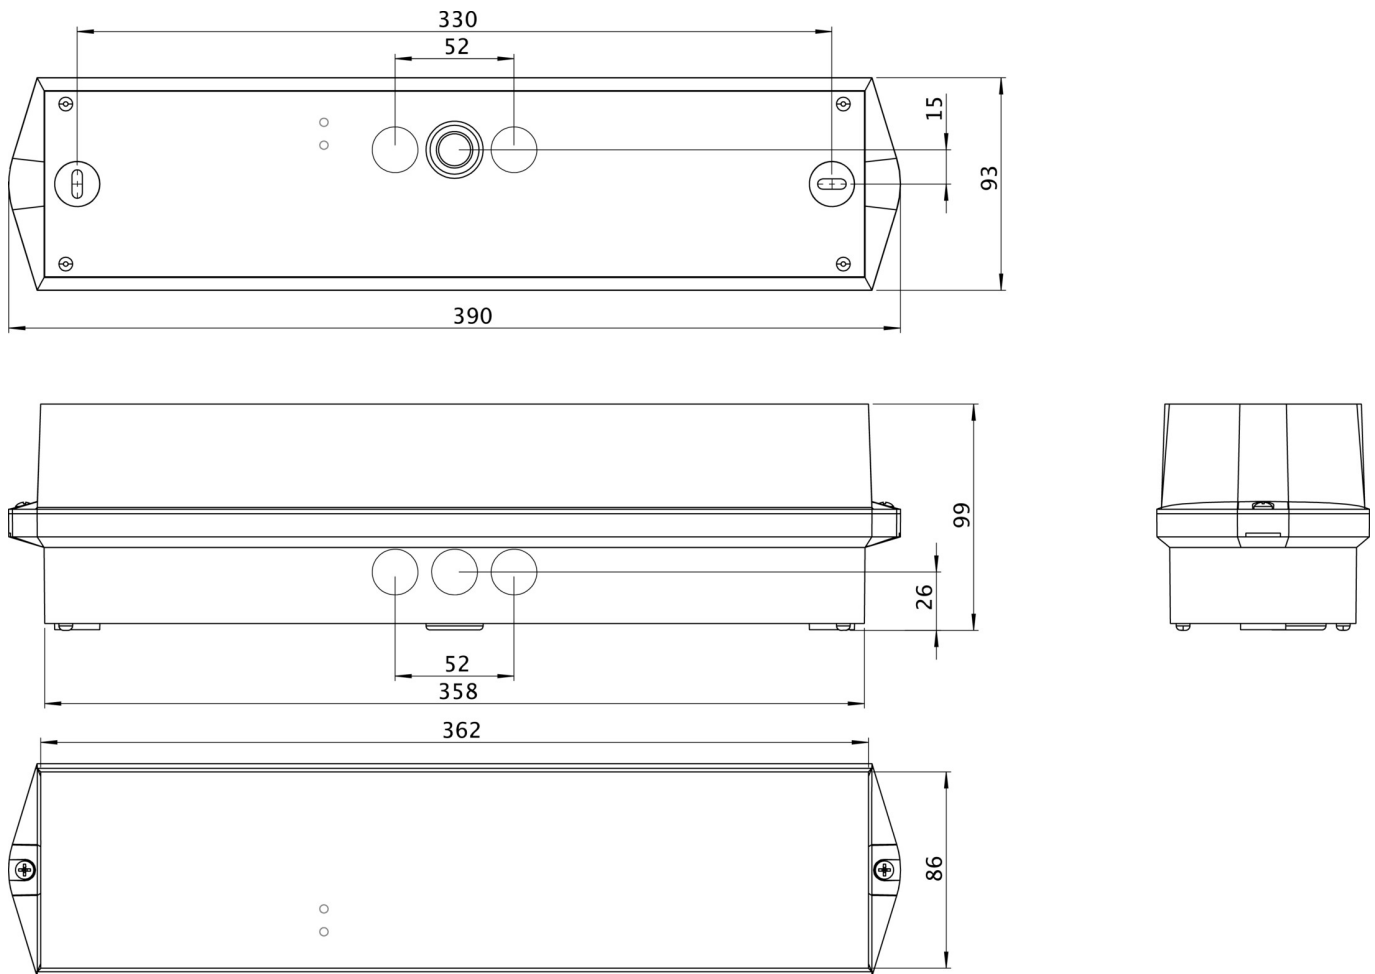

ACCESSORY LIST

BKW -

As of: 09.10.2025 - Subject to technical changes and errors.