



Art.-Nr: KWIW423SC
Emergency light Self-contained
Universal, SelfControl (SC), 3 h , IP65, Polycarbonate, White

Classic, robust, plastic, beam-like safety luminaire with a high level of protection and for versatile use.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

www.rp-group.com/en/item/KWIW423SC



TECHNICAL DATA


| | |
|------------------------|-----------------------------|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE, 5 years warranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | LiFePO4 6,4 V/3,3 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltageAC | 180 V - 250 V |
| Input frequency | 50 Hz |
| Power max. | 8,2 W |
| Power maintained | 7 W |
| Power non-maintained | 2 W |



| | |
|---|---------------------|
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 86 mm |
| Width | 390 mm |
| Height | 99 mm |
| Weight | 0.86 |
| Weight incl. packaging | 0.96 |
| Connection cross-section | 2,5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 520 lm |
| Luminous flux emergency | 520 lm |
| Customs tariff number | 94056120 |
| EAN | 4260766553615 |



TECHNICAL DRAWING

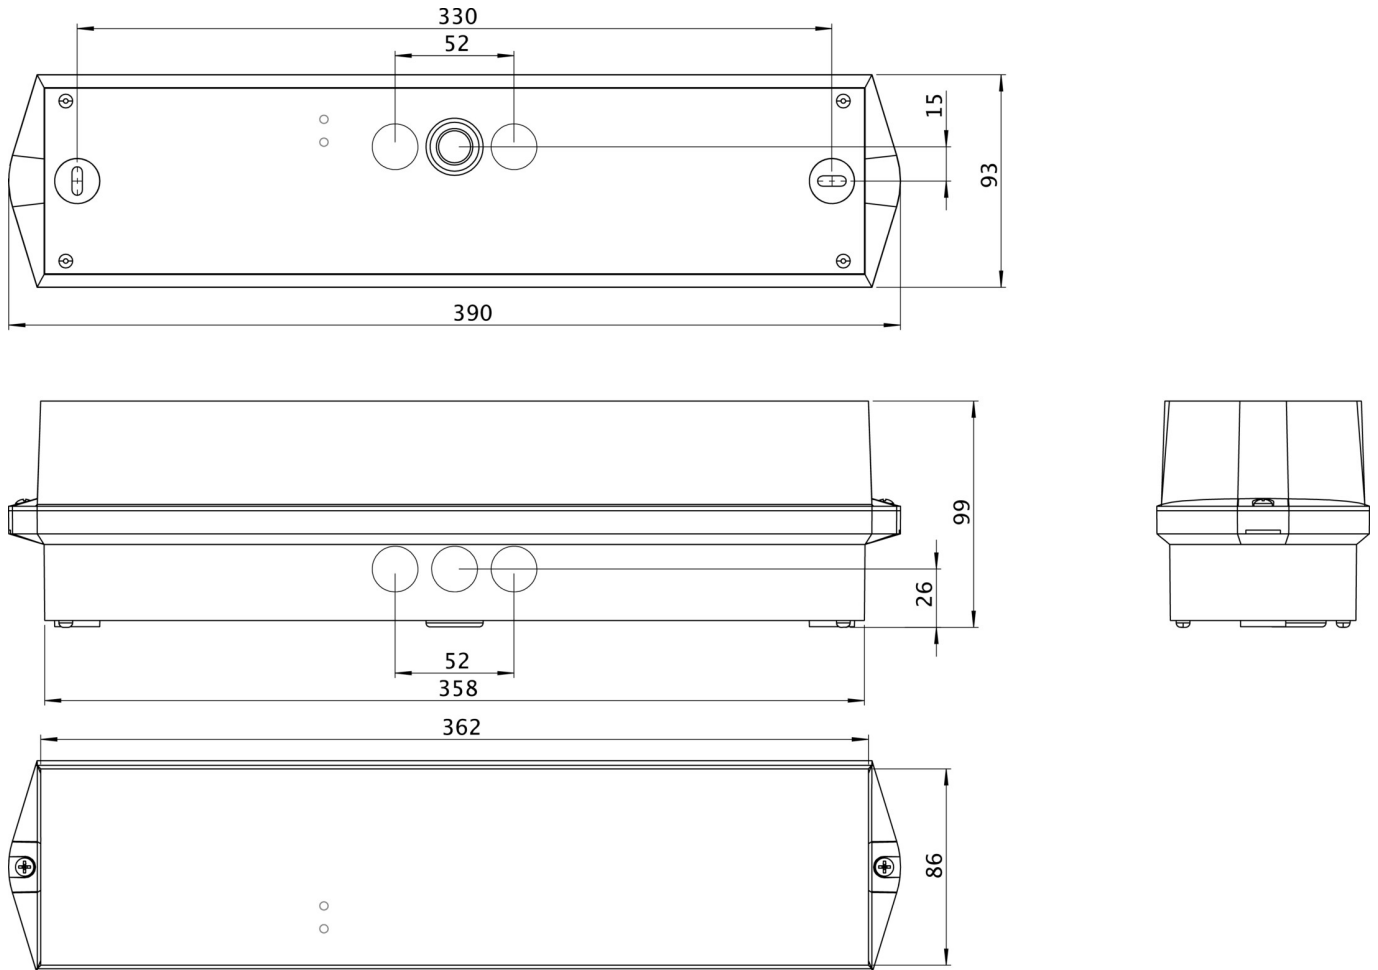

ACCESSORY LIST

BKW -

As of: 24.03.2025 - Subject to technical changes and errors.