



Art.-Nr: KWIW519CC

**Exit sign, Emergency light Centralised power supply systems
Wall mounting, CoreCompact 24 (CC), CPS, 16 m, IP65,
Polycarbonate, White**

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/KWIW519CC



TECHNICAL DATA


| | |
|------------------------|----------------------------------|
| Luminaire type | Exit sign, Emergency light |
| Mounting | Wall mounting |
| Recognition distance | 16 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE |
| Insulation class | 3 |
| Supply | Centralised power supply systems |
| Monitoring | CoreCompact 24 (CC) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Non-maintained / maintained |
| Input voltageAC | 24 V |



| | |
|---|---------------------|
| Power max. | 4,2 W |
| Power maintained | 4,2 W |
| Power non-maintained | 0,4 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 86 mm |
| Width | 390 mm |
| Height | 99 mm |
| Weight | 0.6 |
| Weight incl. packaging | 0.7 |
| Connection cross-section | 2.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Luminous flux mains | 335 lm |
| Luminous flux emergency | 335 lm |
| Customs tariff number | 94056120 |
| EAN | 4260682157478 |



TECHNICAL DRAWING

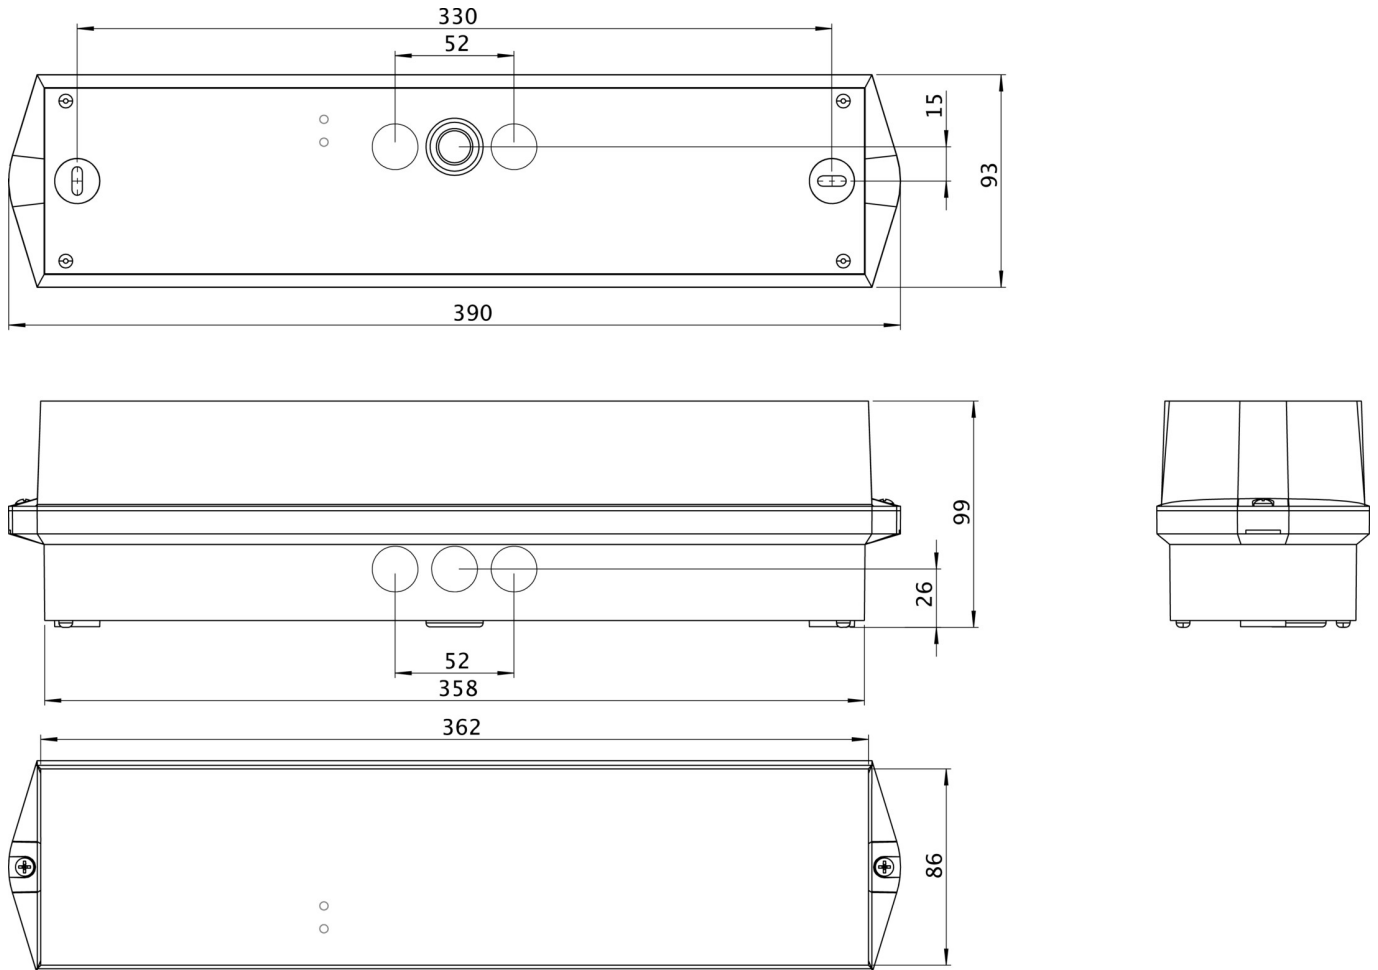

ACCESSORY LIST

BKW -

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|-----------|-------|---------------------------|----------------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KWIW019ML | | Central power supply (ML) | Central power supply | RAL 9003 | €€€ | Yes | low | Yes | 1,920 per system | central |

As of: 15.04.2025 - Subject to technical changes and errors.