



Art.-Nr: KWW013-COOL
Exit sign Self-contained
Wall mounting, Without monitoring, 3 h, 16 m, IP43,
Polycarbonate, White

Classic high-grade plastic luminaire for wall mounting. Pictogram set included. Improved reliability through easy to install universal use of pictograms. Signs according EN 60598-1, EN 60598-2-22 and EN 1838 norms.

The COOL light is equipped with an external battery housing for installation in the building. The installation of the lamp can be done outdoors or in cold stores.



More information

www.rp-group.com/en/item/KWW013-COOL



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP43
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Self-contained
Monitoring	Without monitoring
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	6,1 W
Power maintained	4,5 W



Power non-maintained	0,35 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	92 mm
Width	360 mm
Height	85 mm
Weight	0.83
Weight incl. packaging	0.91
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	150 lm
Customs tariff number	94056120
EAN	4260659562281



TECHNICAL DRAWING

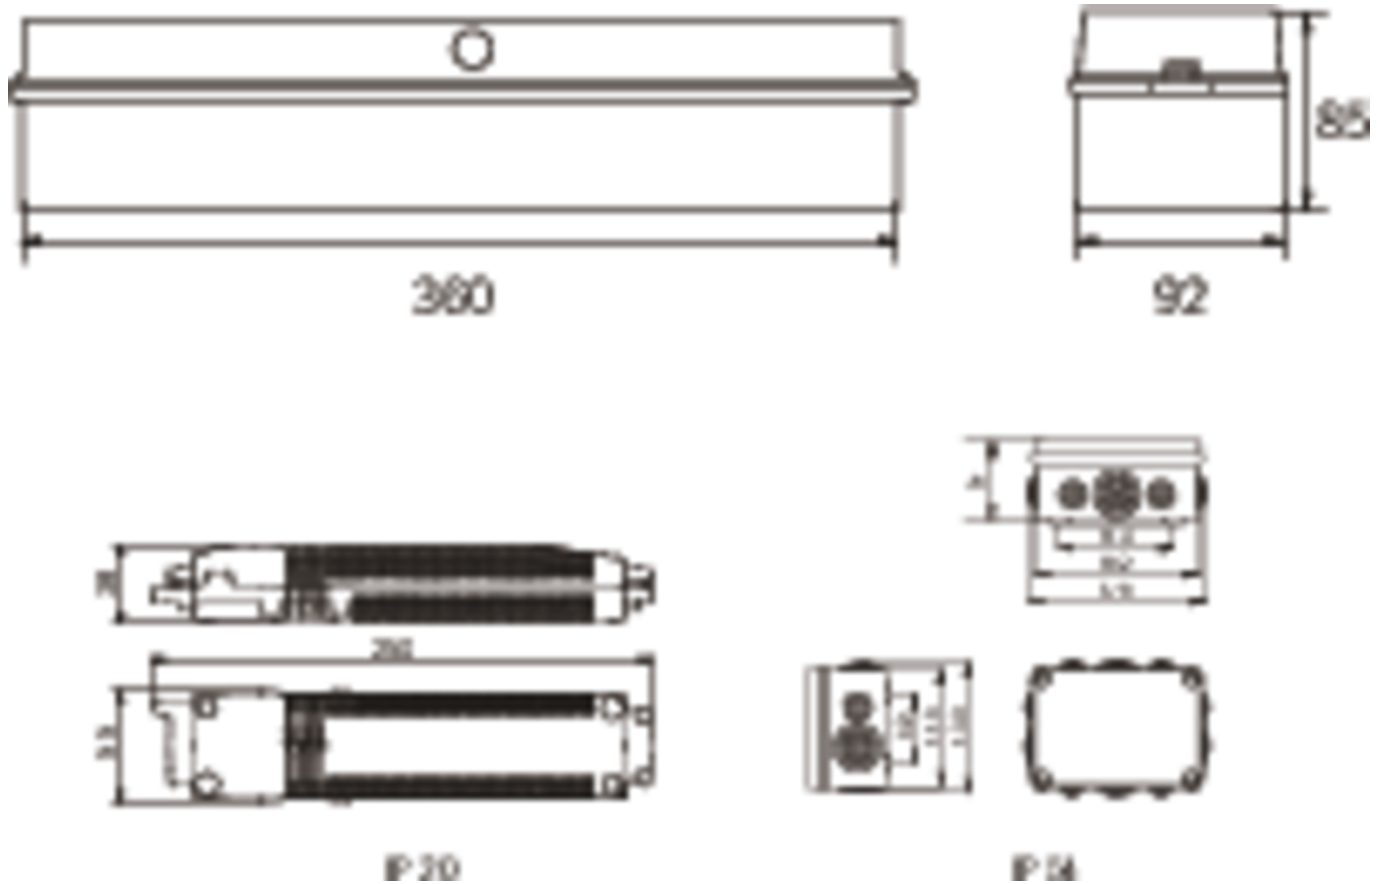












ACCESSORY LIST

BKW -
KWE -
DSA - Wire suspension



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KWW003		Without monitoring		RAL 9003						
KWW003BC		Bus control		RAL 9003						
KWW003SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KWW003WL		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
KWW013		Without monitoring		RAL 9003						
KWW013-K		Without monitoring		RAL 9003						
KWW013BC		Bus control		RAL 9003						
KWW013SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KWW013SC-COOL		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KWW013SC-K		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KWW013WL		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 01.04.2025 - Subject to technical changes and errors.