



**Art.-Nr: KXU009**  
**Exit sign Centralised power supply systems**  
**Universal, Without monitoring, CPS, 30 m, IP40, Plastic, white**

Innovative plastic emergency exit sign luminaire for universal mounting, in a conically tapering housing producing an appealing look. Suited to inscription on one or two sides.



Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information  
[www.rp-group.com/en/item/KXU009](http://www.rp-group.com/en/item/KXU009)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, ENEC, TÜV Rheinland Type approved
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	0,9 W
Power DS	0,9 W
Power BS	0 W
Ambient temperature DS	-25 °C to 40 °C
Ambient temperature BS	-25 °C to 40 °C
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.83
Weight incl. packaging	0.94
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	32 lm
Luminous flux emergency	32 lm
Customs tariff number	94056120
EAN	4260123680893



## TECHNICAL DRAWING

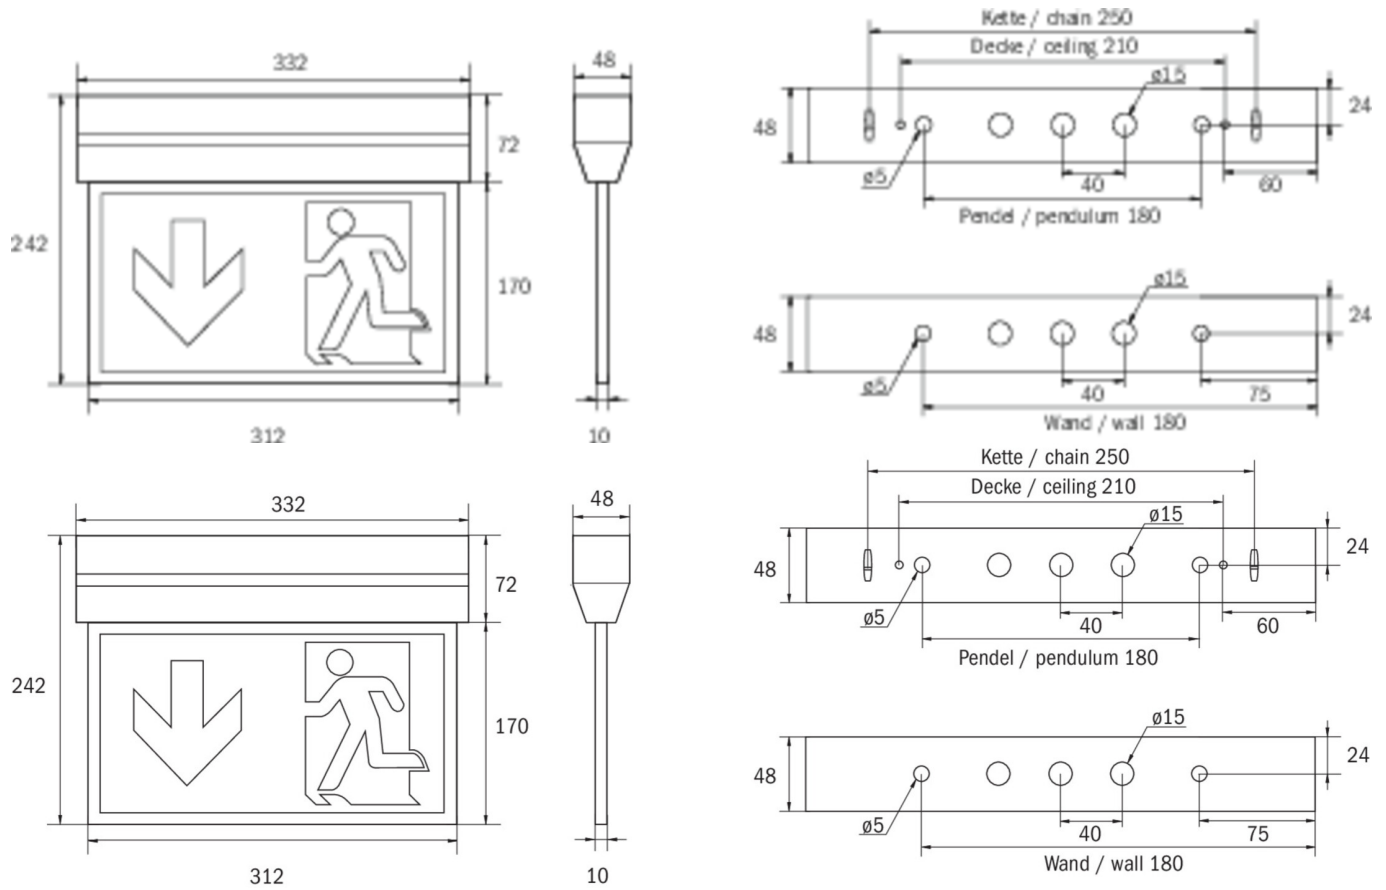

## ACCESSORY LIST

- KXE-EB -
- AWX001 -
- DSA - Wire suspension
- 2PW-EB - Pendant
- 2DW-EB -
- KXBE -

As of: 20.01.2025 - Subject to technical changes and errors.