



Art.-Nr: KXU009ML **Exit sign Centralised power supply systems** Universal, Central power supply (ML), CPS, 30 m, IP40, Polycarbonate, White

Innovative plastic emergency exit sign luminaire for universal mounting, in a conically tapering housing producing an appealing look. Suited to inscription on one or two sides.



Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.







More information www.rp-group.com/en/item/KXU009ML



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, ENEC, TÜV Rheinland Type approved
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching





Input voltageAC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	2,2 W
Power maintained	2,2 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.86
Weight incl. packaging	0.97
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	32 lm
Luminous flux emergency	32 lm
Customs tariff number	94056120
EAN	4260123681609






75

60

75

24

TECHNICAL DRAWING

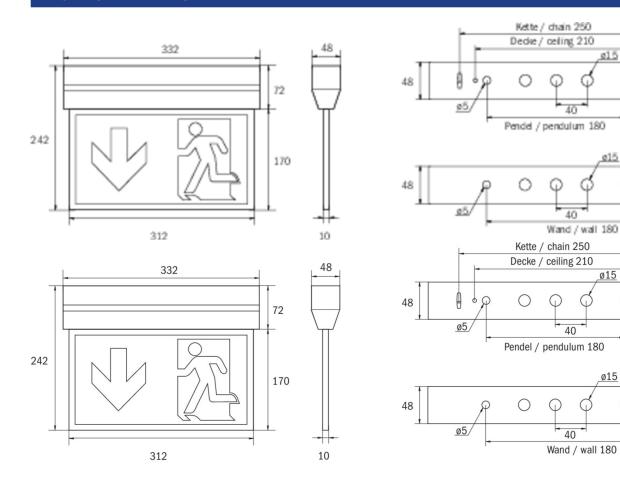

ACCESSORY LIST

KXE-EB -

AWX001 -

DSA - Wire suspension

2PW-EB - Pendant

2DW-EB -

KXBE -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KXU019ML	₹	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KXU029ML	5 >	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central

As of: 23.04.2025 - Subject to technical changes and errors.