



Art.-Nr: LFD12001SC-NW
General light, Emergency light Self-contained
Universal, SelfControl (SC), 1 h, , IP65, Polycarbonate, Light
grey



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Automatic monitoring of safety luminaire with SelfControl.



More information

www.rp-group.com/en/item/LFD12001SC-NW




TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2 V/3,0 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power maintained	36 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1220 mm



Width	82 mm
Height	97 mm
Weight	1.8
Weight incl. packaging	2.05
Connection cross-section	1.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	4400 lm
Customs tariff number	94051140
EAN	4260659566456

TECHNICAL DRAWING

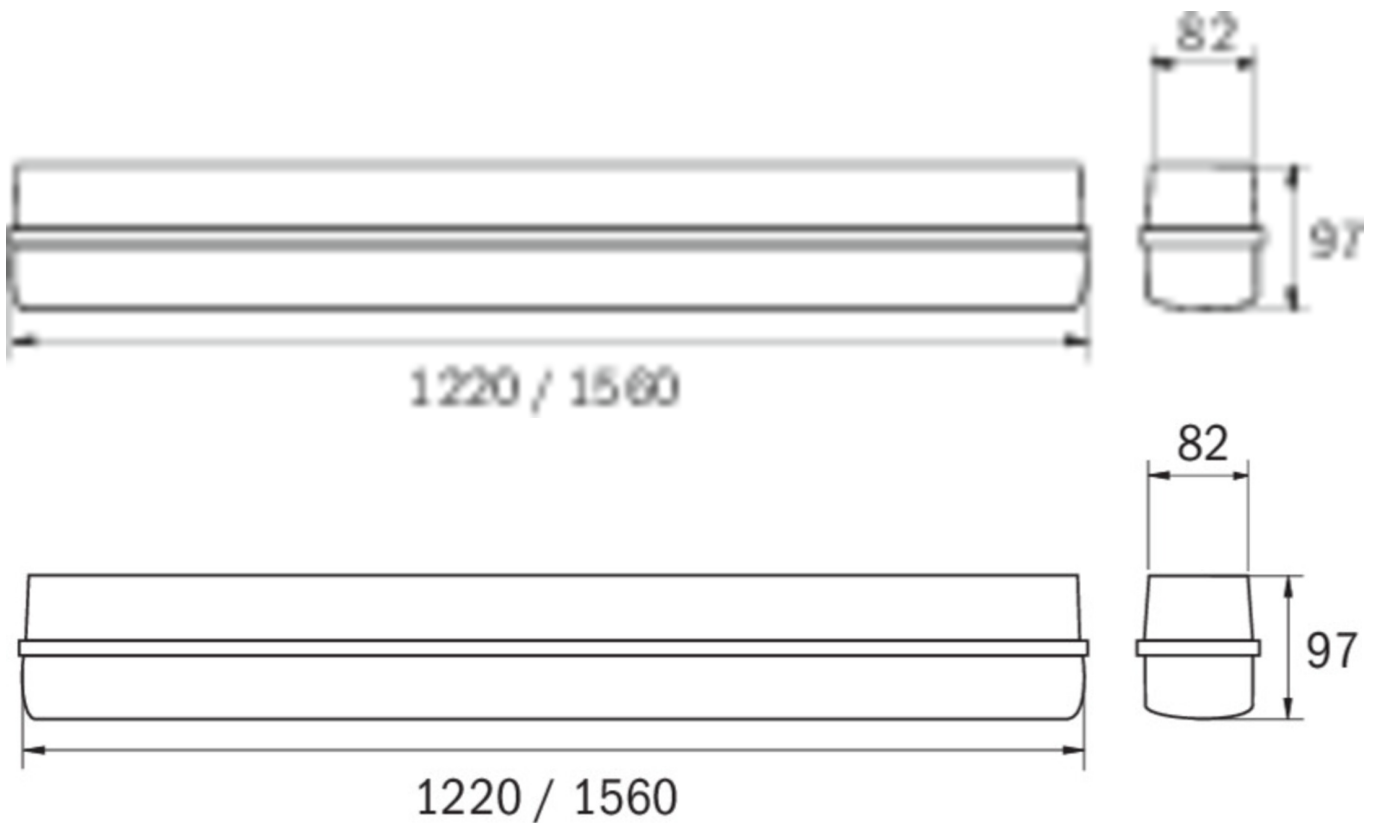

As of: 29.04.2025 - Subject to technical changes and errors.