



**Art.-Nr: LFD12003SC-NW**  
**General light, Emergency light Self-contained**  
**Universal, SelfControl (SC), 3 h, , IP65, Polycarbonate, Light**  
**grey**



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Automatic monitoring of safety luminaire with SelfControl.



More information

[www.rp-group.com/en/item/LFD12003SC-NW](http://www.rp-group.com/en/item/LFD12003SC-NW)



## TECHNICAL DATA


Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/4,5 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	40 W
Power maintained	39 W
Power non-maintained	0,5 W
Ambient temperature maintained mode	-5 °C to 40 °C



Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1220 mm
Width	82 mm
Height	97 mm
Weight	1.927
Weight incl. packaging	2.177
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	4500 lm
Luminous flux emergency	500 lm
Customs tariff number	94051140
EAN	4260659566463



## TECHNICAL DRAWING

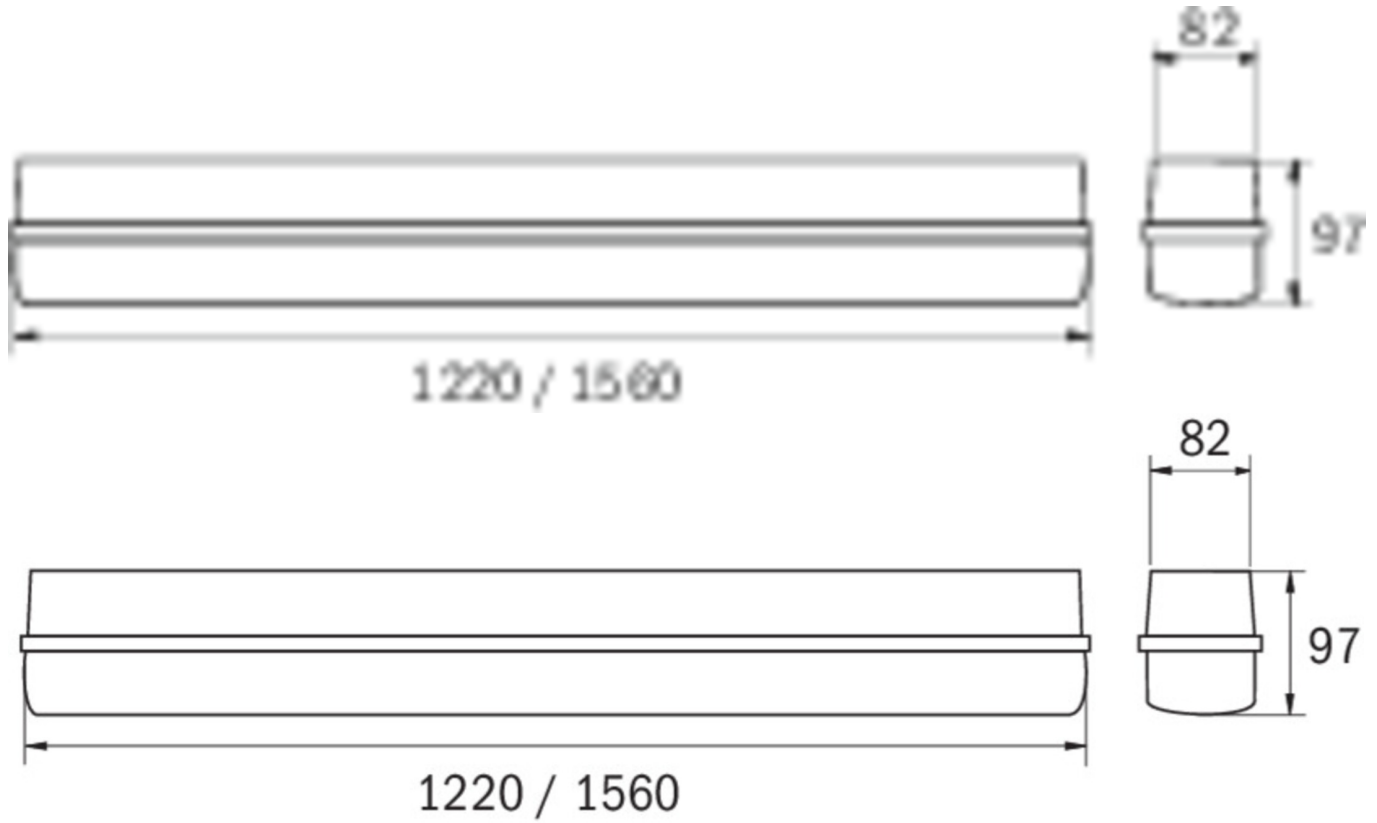

## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main-tenance	max. luminai-res	Single luminai-re monitoring
----------	-------	------------	--------	-------	------------	---------------	-------------------	---------------------	------------------	------------------------------

As of: 29.04.2025 - Subject to technical changes and errors.