



**Art.-Nr: LFD12009-NW**  
**General light, Safety luminaire Centralised power supply systems**  
**Universal, Without monitoring, CPS, , IP65, Polycarbonate, Light grey**



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.



More information

[www.rp-group.com/en/item/LFD12009-NW](http://www.rp-group.com/en/item/LFD12009-NW)



## TECHNICAL DATA


Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Standby circuit / permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	36 W
Power DS	36 W
Ambient temperature DS	-5 °C to 40 °C



Ambient temperature BS	-5 °C to 40 °C
Depth	1220 mm
Width	82 mm
Height	97 mm
Weight	1.8
Weight incl. packaging	2.05
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	4500 lm
Luminous flux emergency	4500 lm
Customs tariff number	94056120
EAN	4260682142085



TECHNICAL DRAWING

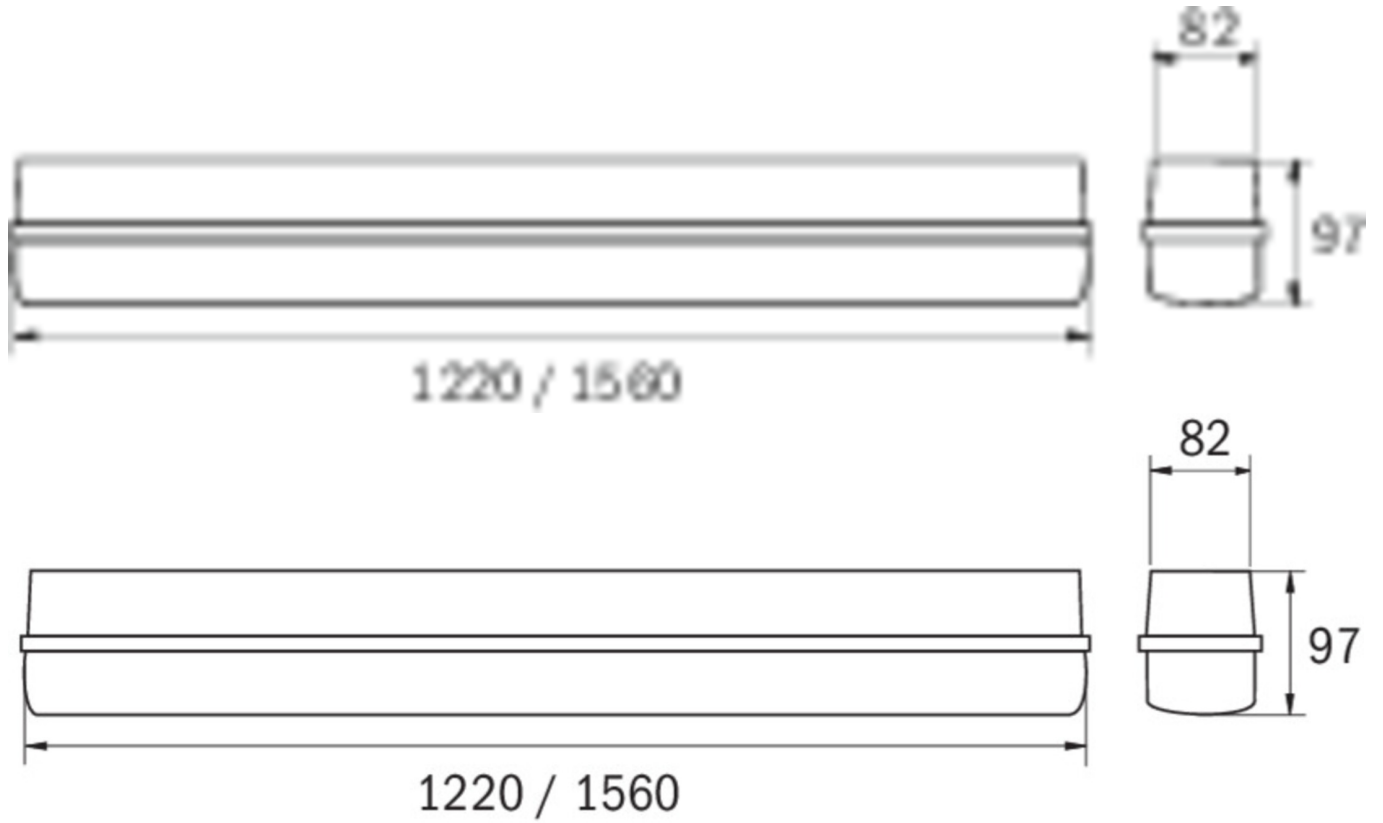

As of: 20.01.2025 - Subject to technical changes and errors.