



Art.-Nr: LFD12009ML-NW
General light, Safety luminaire Centralised power supply systems
Universal, Central power supply (ML), CPS, , IP65,
Polycarbonate, Light grey



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Control and monitoring via central power supply system.



More information

www.rp-group.com/en/item/LFD12009ML-NW



TECHNICAL DATA


| | |
|------------------------|-------------------------------------|
| Luminaire type | General light, Safety luminaire |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | Light grey |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 8 |
| Certification | CE, WEEE |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Standby circuit / permanent circuit |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 38 W |
| Power DS | 38 W |



| | |
|--------------------------|---------------------|
| Power BS | 1,5 W |
| Ambient temperature DS | -5 °C to 40 °C |
| Ambient temperature BS | -5 °C to 40 °C |
| Depth | 1220 mm |
| Width | 82 mm |
| Height | 97 mm |
| Weight | 1.8 |
| Weight incl. packaging | 2.05 |
| Connection cross-section | 1.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 4500 lm |
| Luminous flux emergency | 4500 lm |
| Customs tariff number | 94051140 |
| EAN | 4260682142078 |



TECHNICAL DRAWING

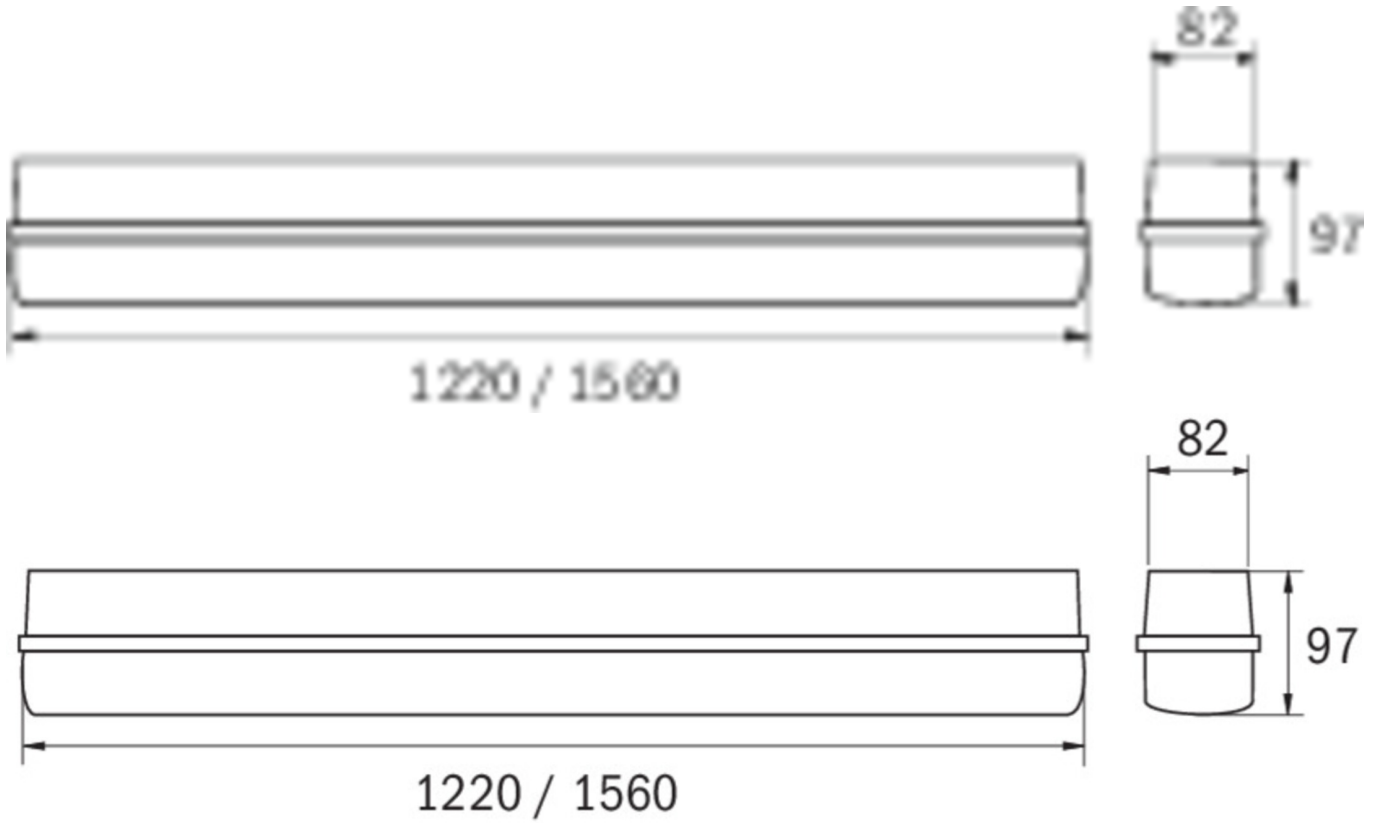

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|----------|-------|------------|--------|-------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
|----------|-------|------------|--------|-------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|

As of: 20.01.2025 - Subject to technical changes and errors.