



**Art.-Nr: LFD12009ML-NW**  
**General light, Emergency light Centralised power supply systems**  
**Universal, Central power supply (ML), CPS, , IP65,**  
**Polycarbonate, Light grey**



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Control and monitoring via central power supply system.



More information

[www.rp-group.com/en/item/LFD12009ML-NW](http://www.rp-group.com/en/item/LFD12009ML-NW)



## TECHNICAL DATA


Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	38 W
Power maintained	38 W



Power non-maintained	1,5 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1220 mm
Width	82 mm
Height	97 mm
Weight	1.8
Weight incl. packaging	2.05
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	4500 lm
Luminous flux emergency	4500 lm
Customs tariff number	94051140
EAN	4260682142078



## TECHNICAL DRAWING

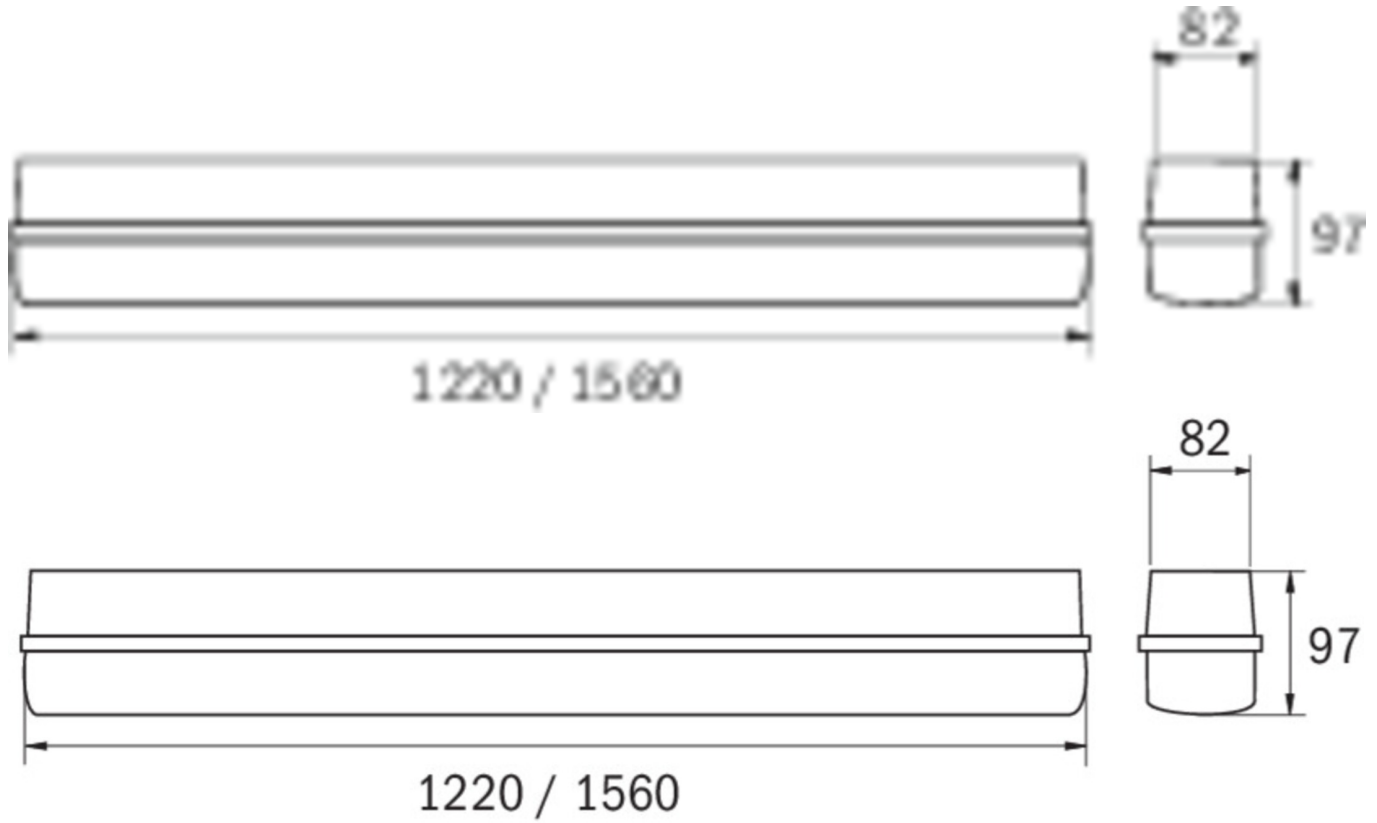

## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main-tenance	max. luminai-res	Single luminai-re monitoring
----------	-------	------------	--------	-------	------------	---------------	-------------------	---------------------	------------------	------------------------------

As of: 29.04.2025 - Subject to technical changes and errors.