



**Art.-Nr: LFD15001SC-NW**  
**General light, Emergency light**  
**Universal, SelfControl (SC), 1 h, , IP65, Polycarbonate, Light grey**



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Automatic monitoring of safety luminaire with SelfControl.



More information

[www.rp-group.com/en/item/LFD15001SC-NW](http://www.rp-group.com/en/item/LFD15001SC-NW)




## TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2 V/3,0 Ah
Power maintained	54 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1560 mm
Width	82 mm
Height	97 mm
Weight	2.2
Weight incl. packaging	2.55



Luminous flux mains	6500 lm
Customs tariff number	94051140
EAN	4260659566487

## TECHNICAL DRAWING

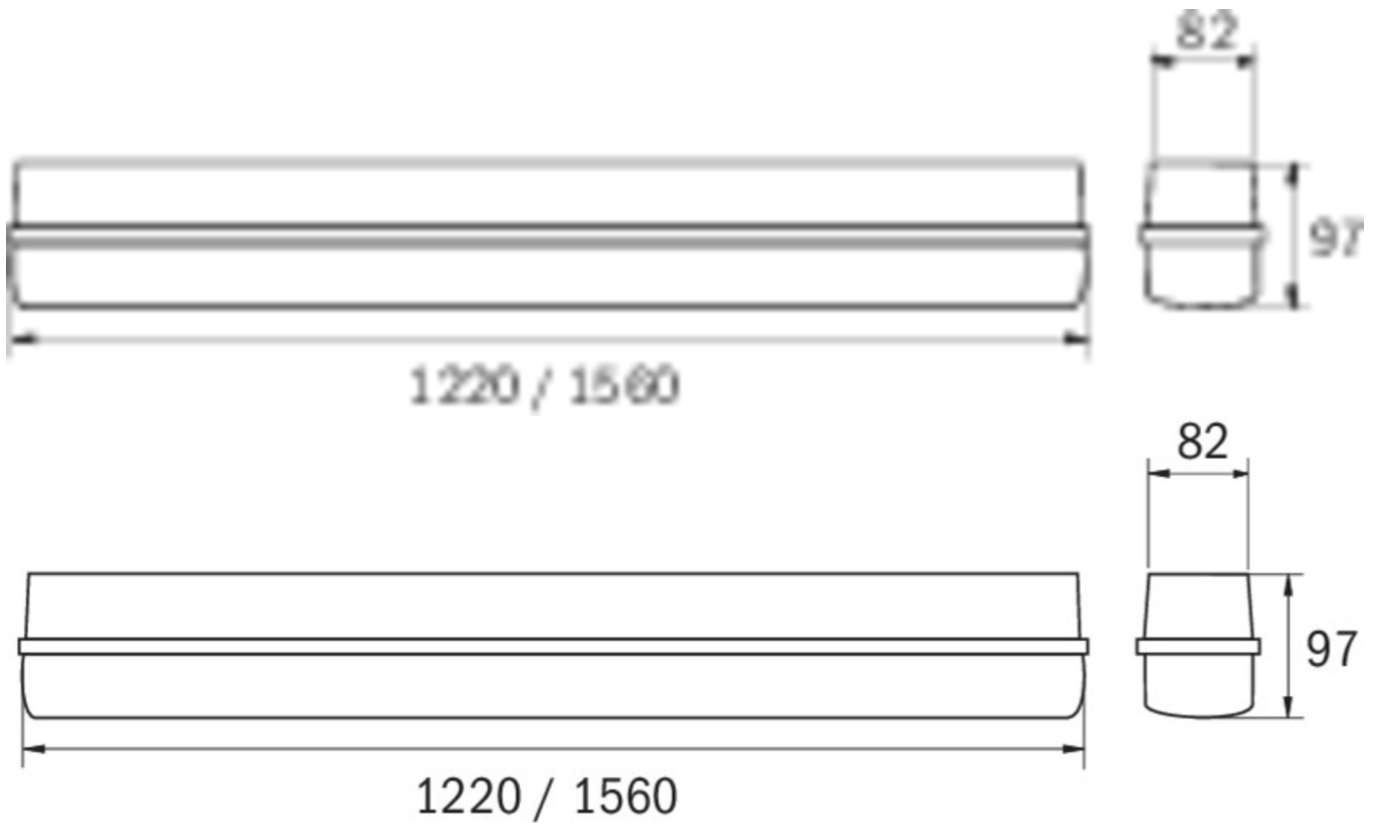

As of: 20.03.2025 - Subject to technical changes and errors.