



Art.-Nr: LFD15003SC-NW-BM
General light, Emergency light
Universal, SelfControl (SC), 8 h , IP65, Polycarbonate, Light grey



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Automatic monitoring of safety luminaire with SelfControl.



More information

www.rp-group.com/en/item/LFD15003SC-NW-BM




TECHNICAL DATA

| | |
|---|--------------------------------|
| Luminaire type | General light, Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Housing material | Polycarbonate |
| Housing color | Light grey |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 8 |
| Certification | CE, WEEE |
| Insulation class | 1 |
| Monitoring | SelfControl (SC) |
| Bridging time | 8 h |
| Battery | LiFePO4 3,2 V/4,5 Ah |
| Power maintained | 54 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 1560 mm |
| Width | 82 mm |
| Height | 97 mm |
| Weight | 2.327 |
| Weight incl. packaging | 2.677 |
| Luminous flux mains | 6500 lm |



| | |
|-----------------------|---------------|
| Customs tariff number | 94051140 |
| EAN | 4262483025970 |

TECHNICAL DRAWING

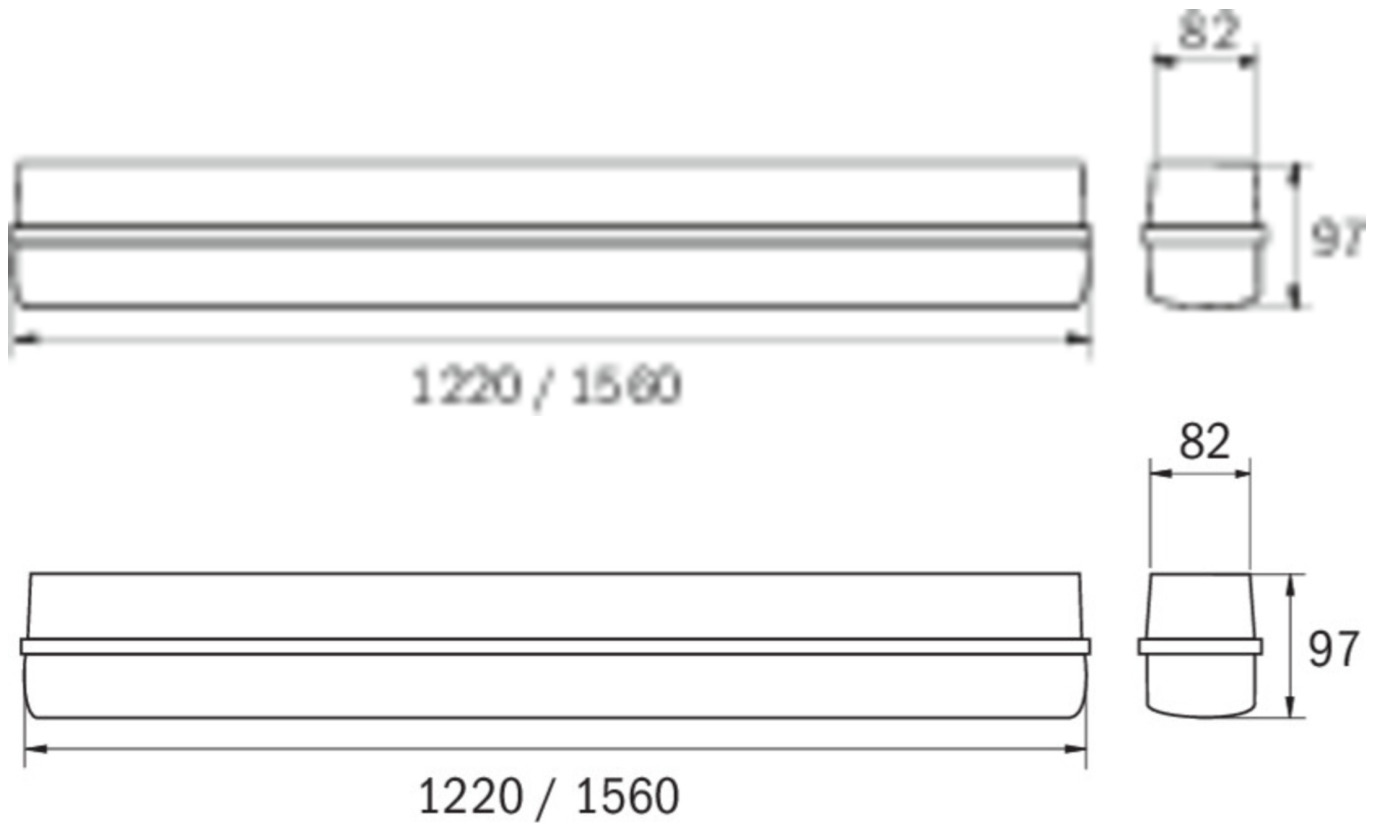

As of: 29.04.2025 - Subject to technical changes and errors.