



Art.-Nr: LFD15003SC-NW
General light, Emergency light Self-contained
Universal, SelfControl (SC), 3 h, , IP65, Polycarbonate, Light
grey



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Automatic monitoring of safety luminaire with SelfControl.



More information

www.rp-group.com/en/item/LFD15003SC-NW



TECHNICAL DATA


Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/4,5 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	55 W
Power maintained	54 W
Power non-maintained	0,5 W
Ambient temperature maintained mode	-5 °C to 40 °C



Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1560 mm
Width	82 mm
Height	97 mm
Weight	2.327
Weight incl. packaging	2.677
Connection cross-section	1.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	7000 lm
Luminous flux emergency	500 lm
Customs tariff number	94051140
EAN	4260659566494



TECHNICAL DRAWING

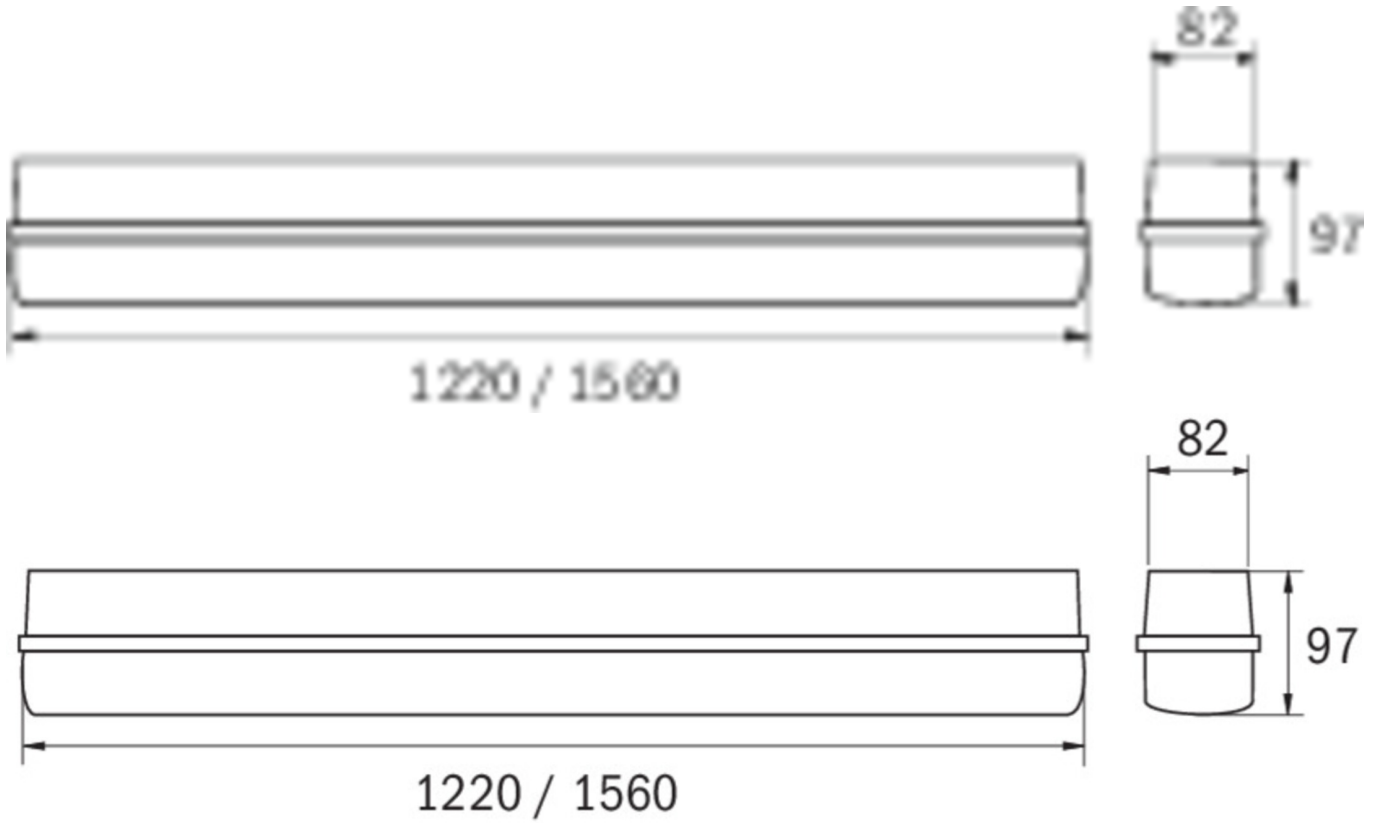

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
----------	-------	------------	--------	-------	------------	---------------	-------------------	--------------------	-----------------	-----------------------------

As of: 20.03.2025 - Subject to technical changes and errors.