




Art.-Nr: LFU12009ML-CCT-D
Emergency light, General light
Wall mounting, Surface mounting, Central power supply
(ML), , , IP66, Polycarbonate, Light grey

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

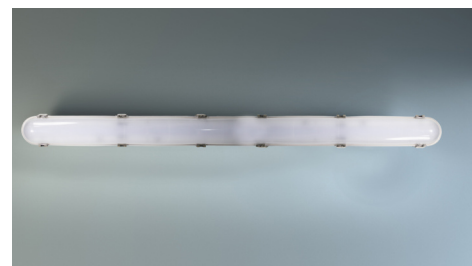

The wattage (18-36W) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Control and monitoring via central power supply system.



More information

www.rp-group.com/en/item/LFU12009ML-CCT-D




TECHNICAL DATA

Luminaire type	Emergency light, General light
Mounting	Wall mounting, Surface mounting
Pictograph	No
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP66
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Monitoring	Central power supply (ML)
Battery	/
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	1220 mm
Width	82 mm
Height	97 mm
Weight	1.8



Weight incl. packaging	2.05
Customs tariff number	94056120
GTIN	4262483029831

TECHNICAL DRAWING

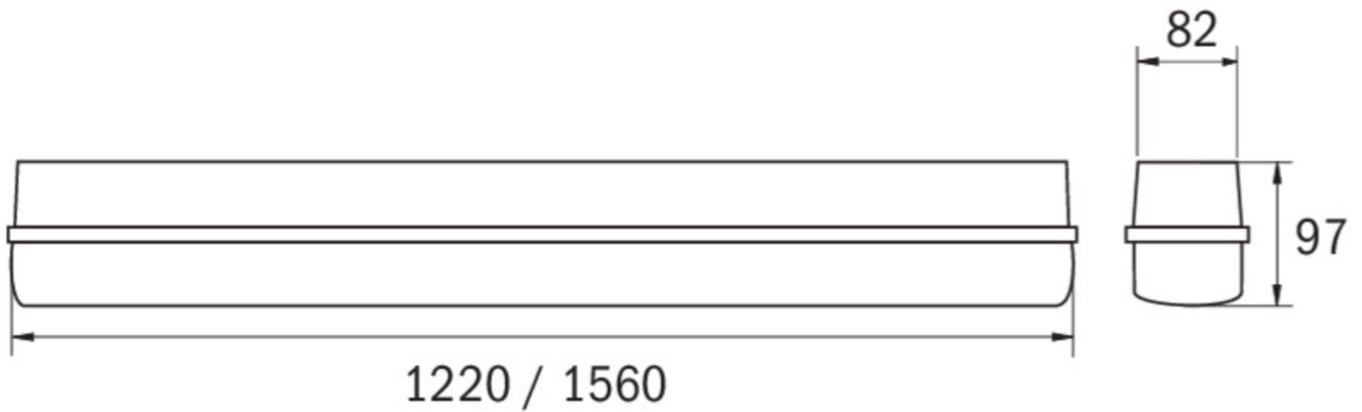

As of: 24.09.2025 - Subject to technical changes and errors.