




Art.-Nr: LFU12403SC-CCT-BM
Emergency light, General light Self-contained
Wall mounting, Surface mounting, SelfControl (SC), 3 h, ,
IP66, Polycarbonate, Light grey

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

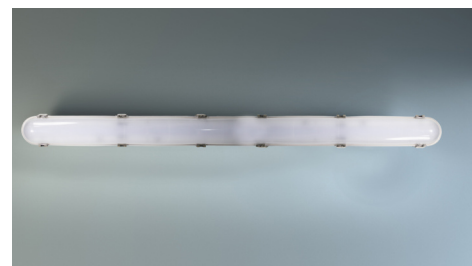

The wattage (18-36W) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Automatic monitoring of safety luminaire with SelfControl. The integrated motion detector (**BM**) reliably detects movements and automatically turns on the light in mains operation.



More information

www.rp-group.com/en/item/LFU12403SC-CCT-BM




TECHNICAL DATA

Luminaire type	Emergency light, General light
Mounting	Wall mounting, Surface mounting
Pictograph	No
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP66
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	220 V - 240 V
Input frequency	50 / 60 Hz



Power max.	36 W
Power maintained	36 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1220 mm
Width	82 mm
Height	97 mm
Weight	285.8
Weight incl. packaging	286.05
Connection cross-section	2,5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	5040 lm
Customs tariff number	94051140
GTIN	4262484980278

TECHNICAL DRAWING

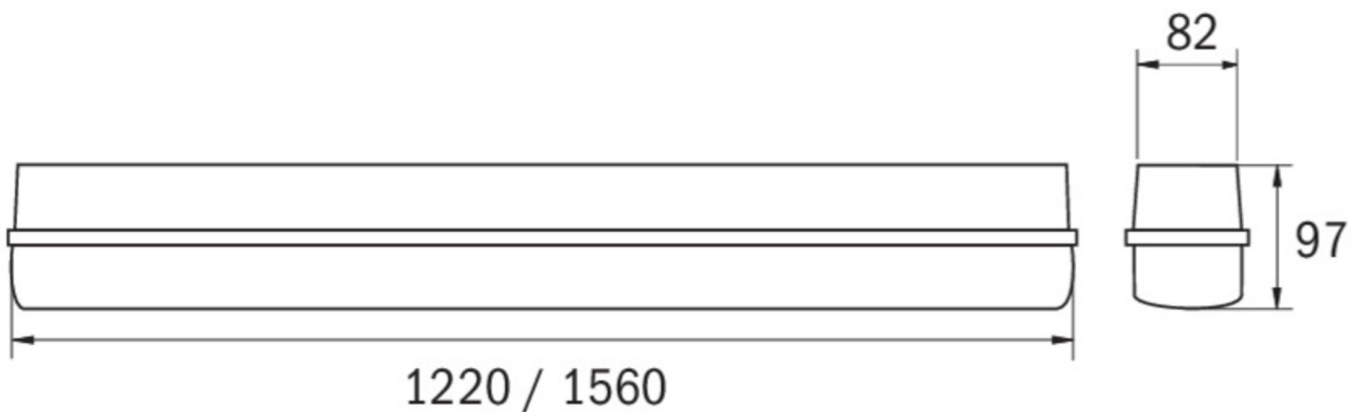

As of: 29.09.2025 - Subject to technical changes and errors.