




**Art.-Nr: LFU12403SC-CCT-D**  
**Emergency light, General light Self-contained**  
**Wall mounting, Surface mounting, SelfControl (SC), 3 h, ,**  
**IP66, Polycarbonate, Light grey**

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

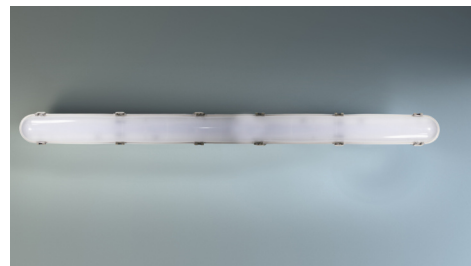

The wattage (18-36W) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is equipped with a DALi driver (D), which allows it to be integrated into the Dali lighting control system.



More information

[www.rp-group.com/en/item/LFU12403SC-CCT-D](http://www.rp-group.com/en/item/LFU12403SC-CCT-D)




## TECHNICAL DATA

|                        |                                 |
|------------------------|---------------------------------|
| Luminaire type         | Emergency light, General light  |
| Mounting               | Wall mounting, Surface mounting |
| Pictograph             | No                              |
| Housing material       | Polycarbonate                   |
| Housing color          | Light grey                      |
| Protection type (IP)   | IP66                            |
| Impact resistance (IK) | 8                               |
| Certification          | CE, WEEE                        |
| Insulation class       | 1                               |
| Supply                 | Self-contained                  |
| Monitoring             | SelfControl (SC)                |
| Bridging time          | 3 h                             |
| Battery                | /                               |
| Operating mode         | Non-maintained / maintained     |
| Input voltage AC       | 220 V - 240 V                   |
| Input frequency        | 50 / 60 Hz                      |



|                                         |                     |
|-----------------------------------------|---------------------|
| Power max.                              | 36 W                |
| Power maintained                        | 36 W                |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 1220 mm             |
| Width                                   | 82 mm               |
| Height                                  | 97 mm               |
| Weight                                  | 285.8               |
| Weight incl. packaging                  | 286.05              |
| Connection cross-section                | 2,5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 5040 lm             |
| Customs tariff number                   | 94051140            |
| GTIN                                    | 4262483029824       |

## TECHNICAL DRAWING

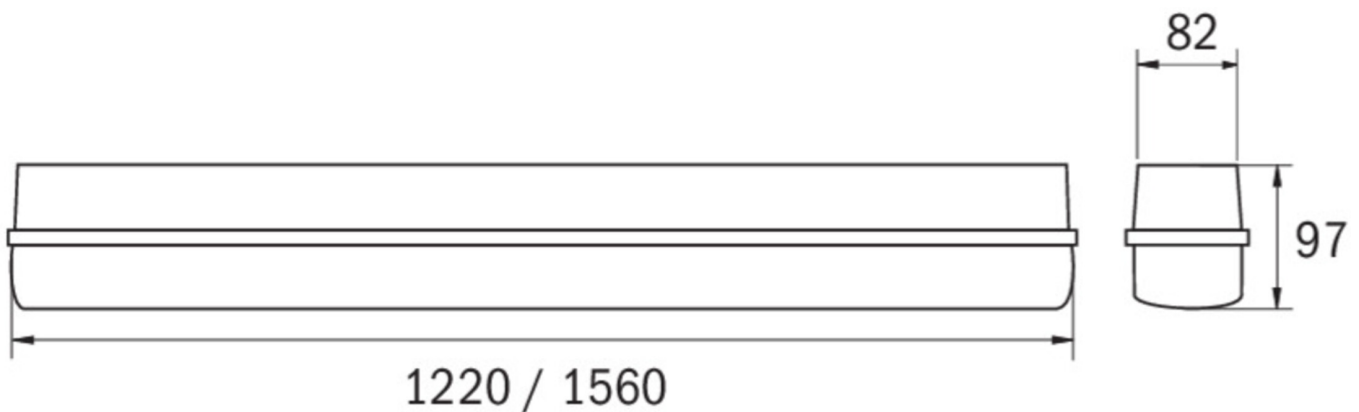

As of: 29.09.2025 - Subject to technical changes and errors.