




## Art.-Nr: LFU15403SC-CCT-D

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

The wattage (36 - 55W / 4400 - 7700lm) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is equipped with a DALi driver (D), which allows it to be integrated into the Dali lighting control system.

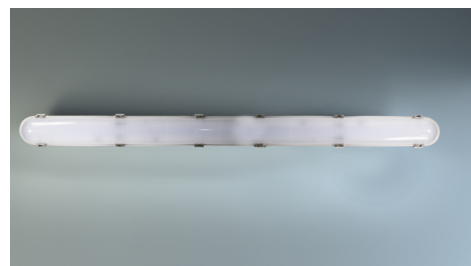

More information

[www.rp-group.com/en/item/LFU15403SC-CCT-D](http://www.rp-group.com/en/item/LFU15403SC-CCT-D)




### TECHNICAL DATA

Luminaire type	Emergency light, General light
Mounting	Wall mounting, Surface mounting
Pictograph	No
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP66
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	220 V - 240 V
Input frequency	50 / 60 Hz
Power max.	55 W
Power maintained	55 W
Ambient temperature maintained mode	-5 °C to 40 °C



Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1560 mm
Width	82 mm
Height	97 mm
Weight	286.2
Weight incl. packaging	286.55
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	7700 lm
Customs tariff number	94051140
GTIN	4262484980285

## TECHNICAL DRAWING

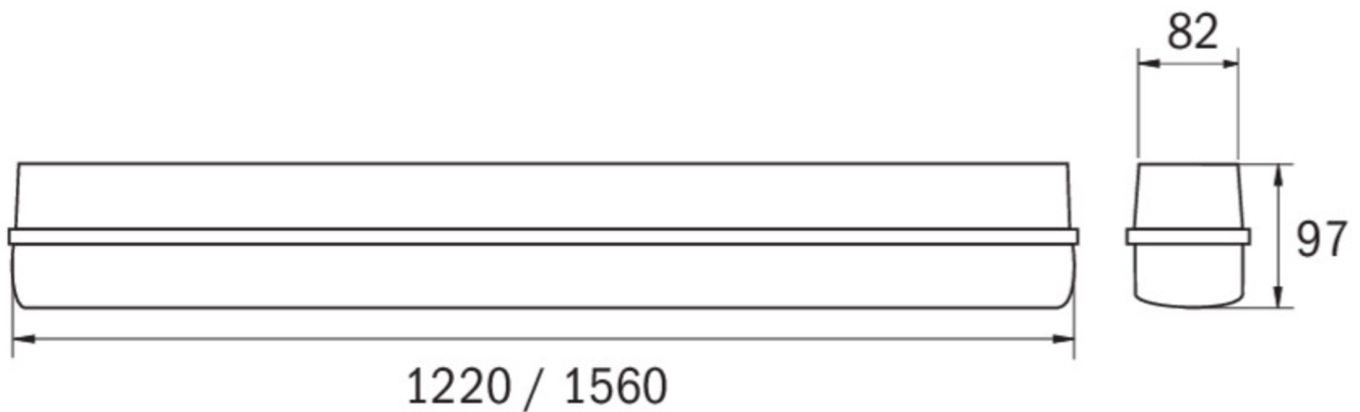

As of: 07.10.2025 - Subject to technical changes and errors.