



## Exit sign Art.-No.: LMW018SC

Emergency luminaire in a sleek Aluminium profile, matt anodized for wall mounting with an additional light source to light the Floor below the luminaire. Housing is openable toollessly. Applicable for maintained or non-maintained operation. The toolless Change and variable use of these pictograms provide planning security on site. Pluggable set of pictograms (left, right, down, up) is included in the scope of delivery. Emergency luminaire according to DIN EN 60598-1, DIN EN 60598-2-22 und DIN EN 1838.




### TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall mounted
Viewing distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Colour	Alu anodized
Mechanical rating IP	40
Impact resistance IK	3
Protection class	1
Supply	Single battery
Monitoring	Self-Control
Operation time	8 h
Battery	9,6V/2.0Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Power consumption max.	6,7 W
Power consumption maintained	4,5 W
Power consumption non-maintained	0,35 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	62 mm
Width	258 mm



Height	147 mm
Weight	1.13 kg
Weight incl. Packaging	1.23 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	Yes
Battery connector	Plug
Dimming function	Yes
Luminous flux mains mode	220 lm
Luminous flux emergency mode	160 lm
Customs tariff number	94056180
Country of origin	Germany
EAN	4260349829731

## TECHNICAL DRAWING

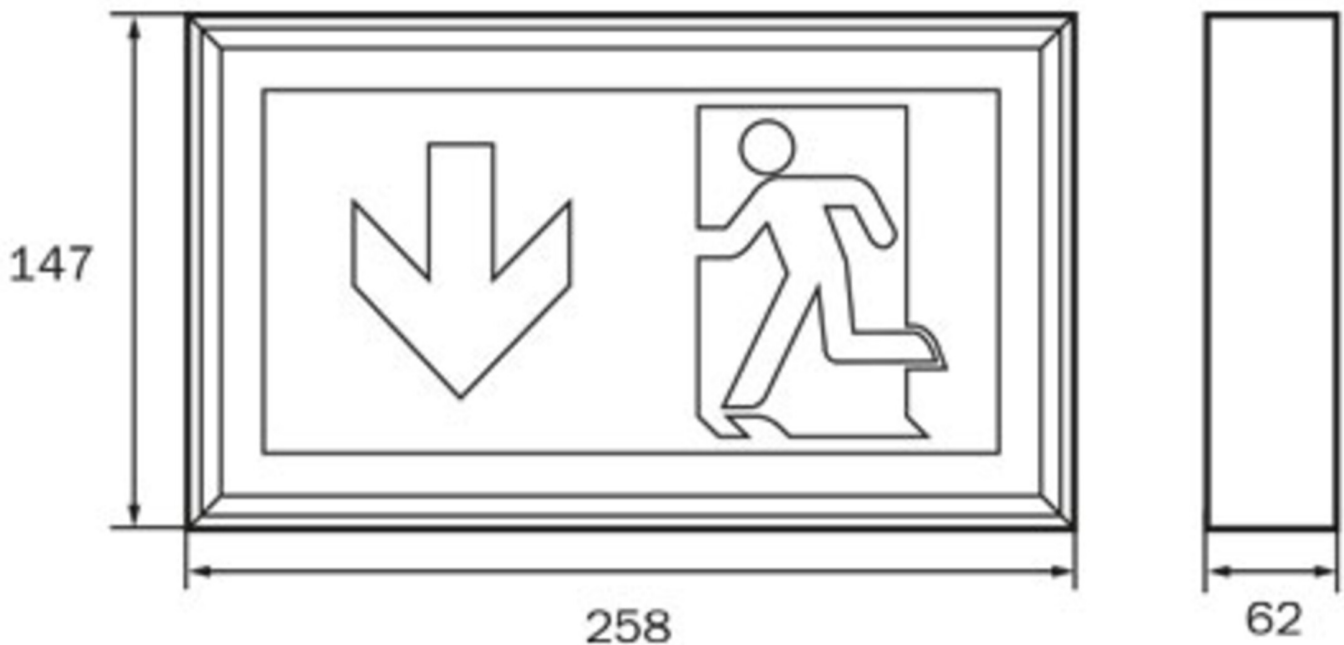

## ACCESSORIES

BALL1 - Ball protection (6W) 320x220x120mm

AWM001-SI - Wall bracket, silver

State: 25.02.2024 - Subject to technical changes