



Art.-Nr: LMW019ML

Exit sign Centralised power supply systems

Wall mounting, Central power supply (ML), CPS, 22 m, IP40, Aluminium, Anodised aluminium

Robust emergency exit sign luminaire made from slim aluminium profile, for wall mounting.

The additional downward light emission helps to illuminate emergency and escape routes.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information
www.rp-group.com/en/item/LMW019ML



TECHNICAL DATA


| | |
|------------------------|----------------------------------|
| Luminaire type | Exit sign |
| Mounting | Wall mounting |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Aluminium |
| Housing color | Anodised aluminium |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 3 |
| Certification | WEEE, CE |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltageAC | 230 V |
| Input frequency | 50 / 60 Hz |



| | |
|--------------------------|---------------------|
| Input voltage DC | 216 V |
| Power max. | 5,2 W |
| Power DS | 5,2 W |
| Power BS | 1,1 W |
| Ambient temperature DS | -20 °C to 40 °C |
| Ambient temperature BS | -20 °C to 40 °C |
| Depth | 62 mm |
| Width | 258 mm |
| Height | 147 mm |
| Weight | 0.89 |
| Weight incl. packaging | 0.99 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 300 lm |
| Luminous flux emergency | 300 lm |
| Customs tariff number | 94056180 |
| EAN | 4260123682019 |



TECHNICAL DRAWING

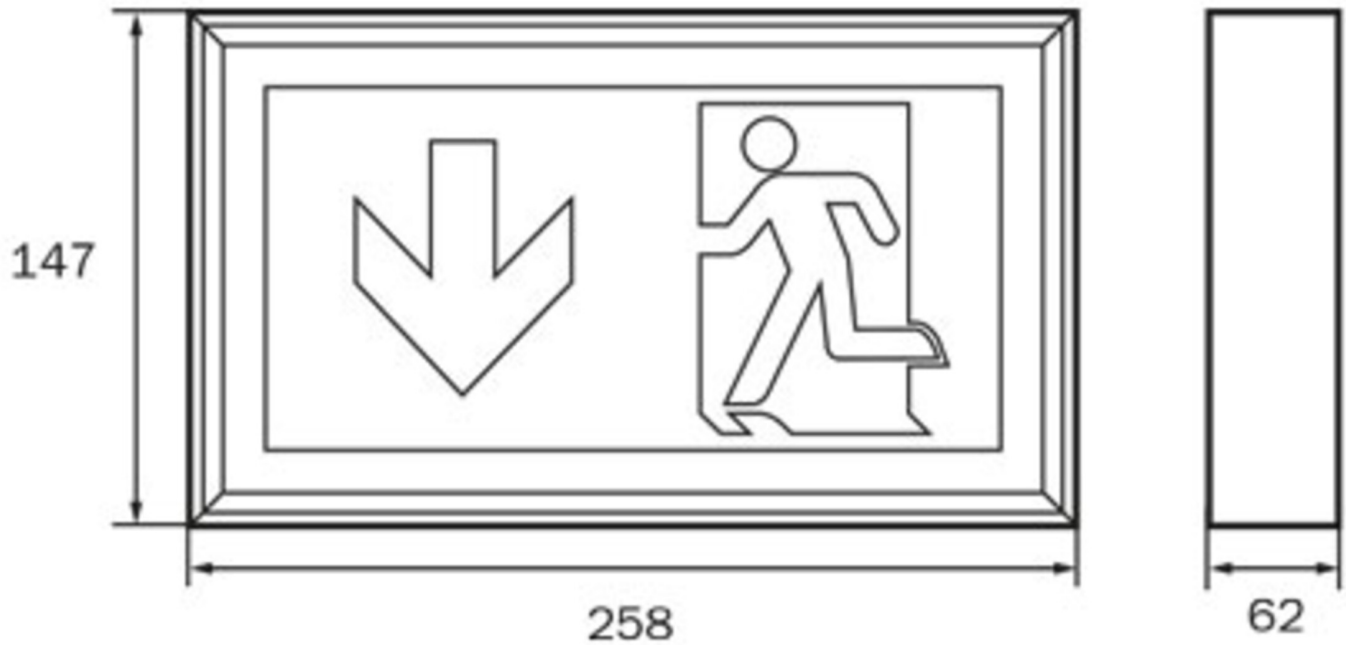

ACCESSORY LIST

BALL1 - Wire mesh guard

AWM001-SI -

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|----------|-------|------------|--------|-------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
|----------|-------|------------|--------|-------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|

As of: 20.12.2024 - Subject to technical changes and errors.