



**Art.-Nr: LSD019ML**

**Exit sign Centralised power supply systems**

**Recessed mounting, Central power supply (ML), CPS, 56 m,  
IP40, Aluminium, Anodised aluminium**

Robust emergency exit sign luminaire made from slim aluminium profile, for ceiling mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Control and monitoring via central power supply system. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information

[www.rp-group.com/en/item/LSD019ML](http://www.rp-group.com/en/item/LSD019ML)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	56 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V



Power max.	9,3 W
Power DS	9,3 W
Power BS	1,1 W
Ambient temperature DS	-20 °C to 40 °C
Ambient temperature BS	-20 °C to 40 °C
Depth	62 mm
Width	614 mm
Height	334 mm
Weight	2.2
Weight incl. packaging	2.2
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	600 lm
Luminous flux emergency	600 lm
Customs tariff number	94056180
EAN	4260123682873



## TECHNICAL DRAWING

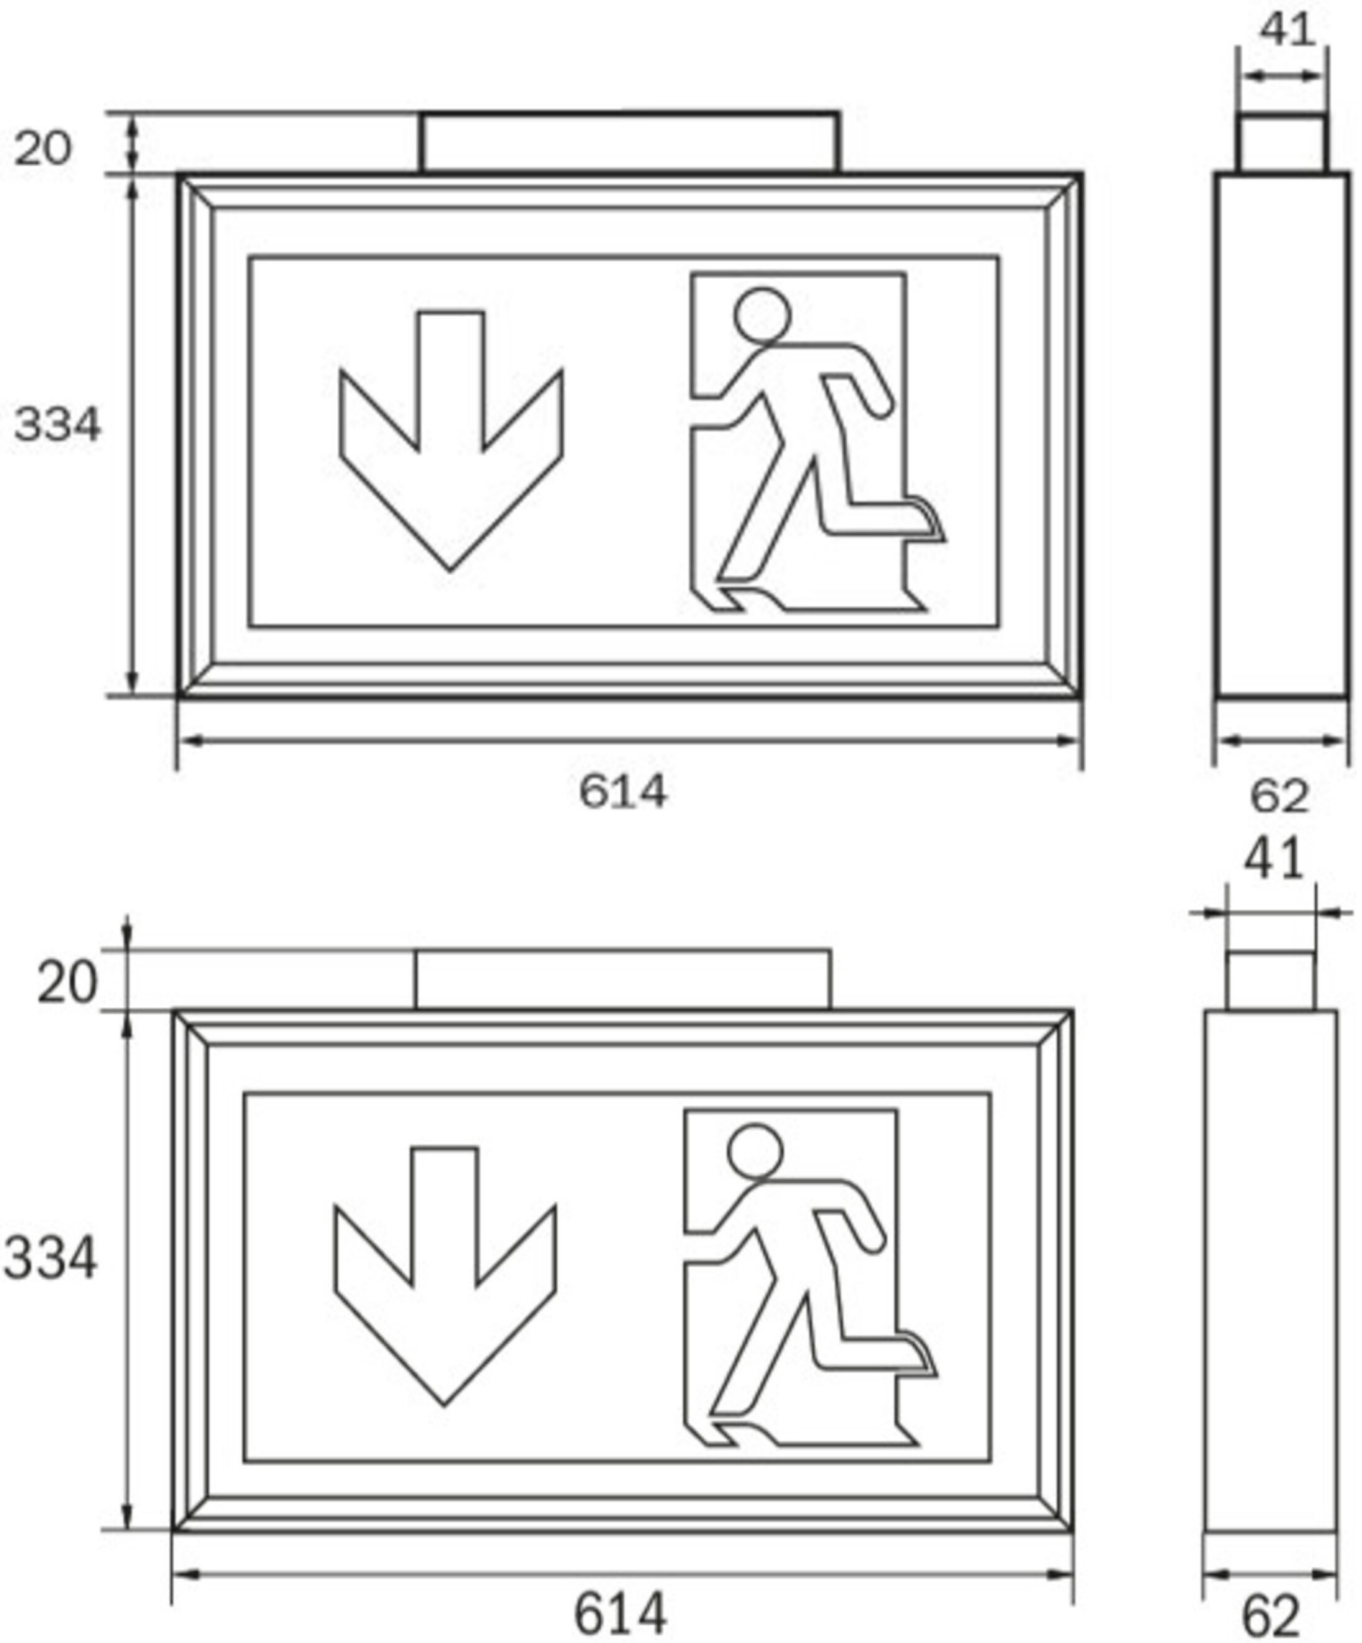



## ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
----------	-------	------------	--------	-------	------------	---------------	-------------------	--------------------	-----------------	-----------------------------

As of: 27.11.2024 - Subject to technical changes and errors.