



**Art.-Nr: LSW019ML**

**Exit sign Centralised power supply systems**

**Wall mounting, Central power supply (ML), CPS, 56 m, IP40, Aluminium, Anodised aluminium**

Robust emergency exit sign luminaire made from slim aluminium profile, for wall mounting.

The additional downward light emission helps to illuminate emergency and escape routes.

Control and monitoring via central power supply system. The requested pictogram (arrow to the right, left, up or down) is supplied as standard.



More information

[www.rp-group.com/en/item/LSW019ML](http://www.rp-group.com/en/item/LSW019ML)



**TECHNICAL DATA**


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign                        |
| Mounting               | Wall mounting                    |
| Recognition distance   | 56 m                             |
| Pictograph             | acc. to Specification            |
| Illuminant             | LED                              |
| Housing material       | Aluminium                        |
| Housing color          | Anodised aluminium               |
| Protection type (IP)   | IP40                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 1                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | single luminaire switching       |
| Input voltage AC       | 230 V                            |
| Input frequency        | 50 / 60 Hz                       |
| Input voltage DC       | 216 V                            |



|                          |                     |
|--------------------------|---------------------|
| Power max.               | 9,3 W               |
| Power DS                 | 9,3 W               |
| Power BS                 | 1,1 W               |
| Ambient temperature DS   | -20 °C to 40 °C     |
| Ambient temperature BS   | -20 °C to 40 °C     |
| Depth                    | 62 mm               |
| Width                    | 614 mm              |
| Height                   | 334 mm              |
| Weight                   | 2.85                |
| Weight incl. packaging   | 2.85                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | No                  |
| Battery connection       | No                  |
| Dimming function         | Yes                 |
| Luminous flux mains      | 600 lm              |
| Luminous flux emergency  | 600 lm              |
| Customs tariff number    | 94056180            |
| EAN                      | 4260123682774       |



## TECHNICAL DRAWING

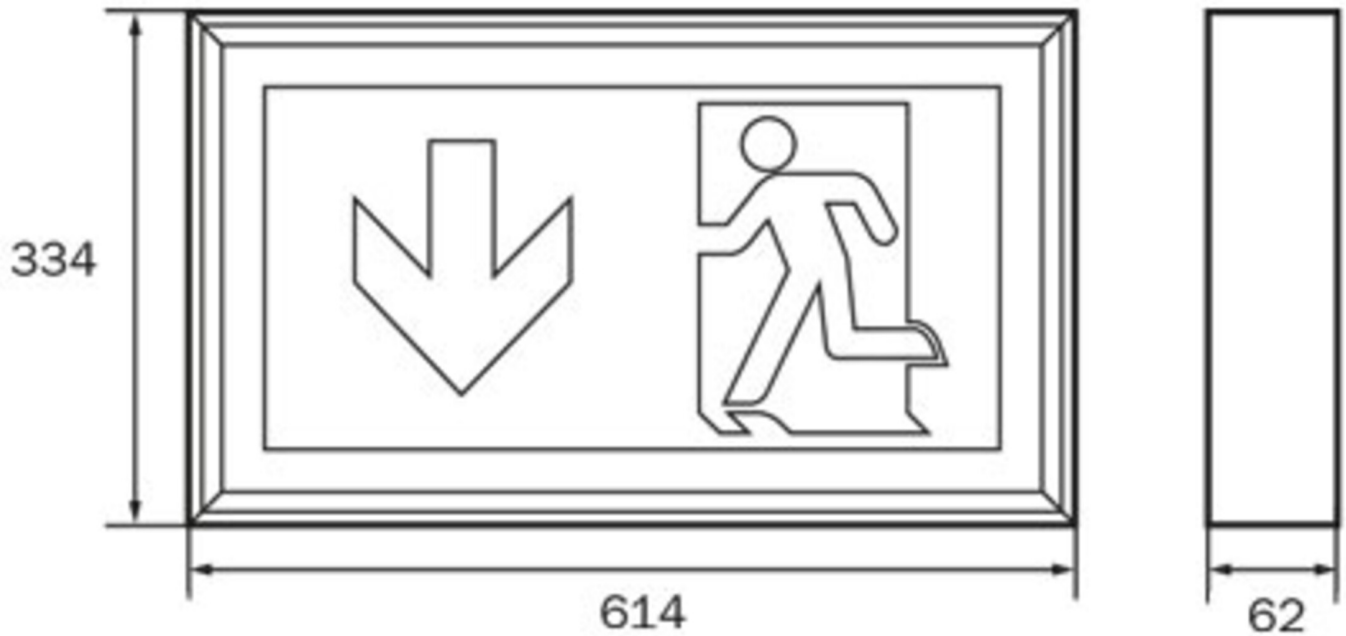

## RELATED PRODUCTS

| Art-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|---------|-------|------------|--------|-------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
|---------|-------|------------|--------|-------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|

As of: 27.11.2024 - Subject to technical changes and errors.