



**Art.-Nr: LXW411SC**

**Exit sign Self-contained**

**Wall mounting, SelfControl (SC), 1 h, 34 m, IP40, Aluminium, Anodised aluminium**

Robust emergency exit sign luminaire made from slim aluminium profile, for wall mounting.

The additional downward light emission helps to illuminate emergency and escape routes.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/LXW411SC](http://www.rp-group.com/en/item/LXW411SC)



## TECHNICAL DATA


|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign                   |
| Mounting               | Wall mounting               |
| Recognition distance   | 34 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Aluminium                   |
| Housing color          | Anodised aluminium          |
| Protection type (IP)   | IP40                        |
| Impact resistance (IK) | 3                           |
| Certification          | WEEE, CE, 5 years warranty  |
| Insulation class       | 1                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 1 h                         |
| Battery                | LiFePO4 6,4 V/1,6 Ah        |
| Operating mode         | Non-maintained / maintained |
| Input voltageAC        | 180 V - 230 V               |
| Input frequency        | 50 Hz                       |



|   |                     |
|---|---------------------|
| Power max.                              | 4,2 W               |
| Power maintained                        | 3,3 W               |
| Power non-maintained                    | 0,9 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 62 mm               |
| Width                                   | 384 mm              |
| Height                                  | 214 mm              |
| Weight                                  | 1.56                |
| Weight incl. packaging                  | 1.76                |
| Connection cross-section                | 2,5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | Connector           |
| Dimming function                        | No                  |
| Luminous flux mains                     | 190 lm              |
| Luminous flux emergency                 | 190 lm              |
| Customs tariff number                   | 94056180            |
| EAN                                     | 4260766556517       |



## TECHNICAL DRAWING

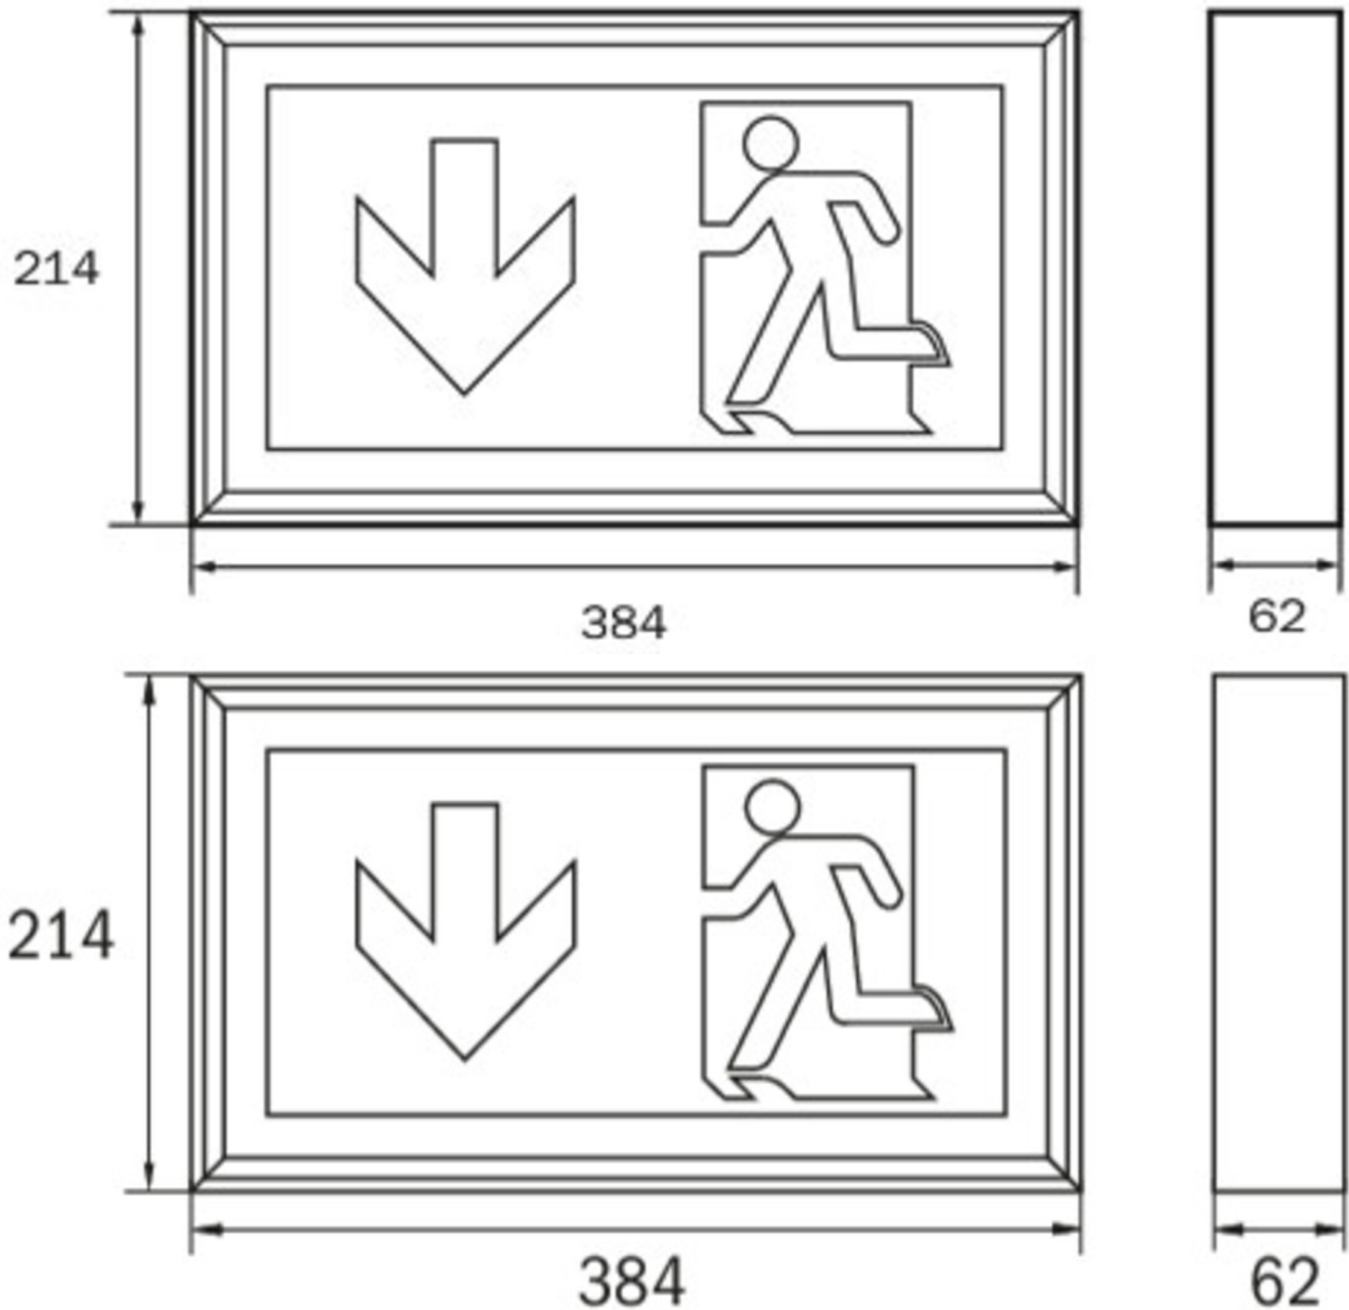

## ACCESSORY LIST

BALL2 - Wire mesh guard

As of: 23.04.2025 - Subject to technical changes and errors.