




Art.-Nr: MC-BMSM-BAC

The MC-BMSM controller is an optional application in a network. Each safety lighting system can consist of a main station and up to 32 substations. Each central unit (main station or substation) manages up to 96 circuits, of which up to 20 lights can be connected to each circuit and monitored. In cooperation with the gateway, the controller ensures that all information is read out from the connected safety lighting systems and made accessible to the outside via ModBus / IP or BACnet. The BMS controller automatically recognizes which protocol is supported / used by the connected building management system.

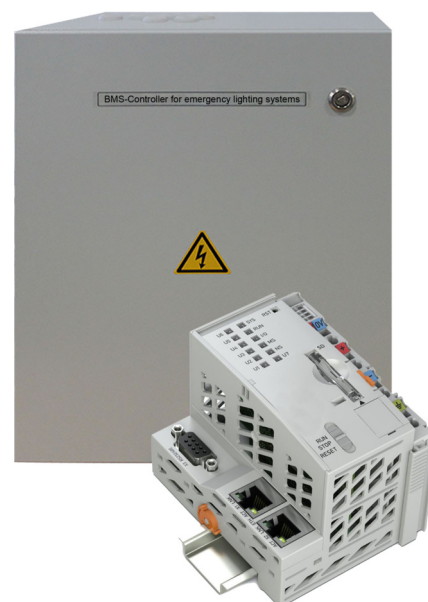

More information

www.rp-group.com/en/item/MC-BMSM-BAC



TECHNICAL DATA

Material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP20
Input voltageAC	230 V V
Input frequency	50 / 60 Hz
Power consumption	12 W
Depth	65 mm
Width	79 mm
Height	72 mm
Weight	0.25 kg
Customs tariff number	85389091

As of: 15.04.2025 - Subject to technical changes and errors.