




Art.-No.: MDX2 multiControl plus MDC, CPS, LDM=2, without

CENTRAL BATTERY SYSTEM

The MDC system is a preconfigured central battery system without power limitation. Depending on the cabinet used, up to 72 circuits with 10A each and a recharging unit of up to 17.5 A, and one each

maintained and non-maintained switch, can be installed per system.

Single luminaire or circuit monitoring is not possible with this system. The ability to switch the circuits is possible only in conjunction with the respective switching or limited. Of course, the MDC can be monitored and networked via the web interface as well.

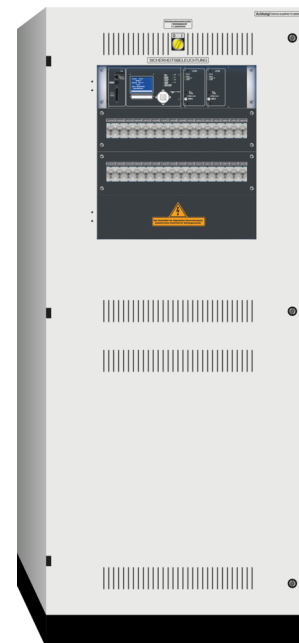

TECHNICAL DATA

Slots 19"	Mit Schützumschaltung
No. of included mains circuits	48
Charging unit included	Yes
SAM module included	Optional
IO module included	Yes
CCIF included	Yes
Networked	Yes
Connnection Substation/Subdistribution	Optional
Max. load 1h	15200 W
Max. load 3h	5000 W
Max. load 8h	1900 W
Input Voltage AC	230V
Input Frequency Hz	50 / 60 Hz
Output voltage AC	230 V
Output voltage DC	216 V
Material	Steel sheet
Colour	RAL 7035
Mechanical rating IP	20



Protection class	1
Length	600 mm
Width	800 mm
Height	1,850 mm
Customs tariff number	85371098
Coutry of origin	Germany

ACCESSORIES

PRUEFBUCH-BELEUCHTUNGSANLAGEN - Test book for safety lighting systems