




## Art.-No.: MNXL112-ELS miniControl XL plus LPS, 6xDCM12-E, CCIF, SAM

MAX. 32 MAINS CIRCUITS / 1.500 W, 1H / 640 LUMINAIRES

The Low Power System miniControl XL plus closes with a maximum output of 1.500 W the gap between the smaller powered miniControl XL plus and the big brother midiControl plus. Through the principle of decentralization per fire compartment, similar to a single battery system, there will be no costs for E30-powerlines and their installation. The miniControl XL plus is installed in an operating room in each fire compartment.

Batteries are not included and have to be ordered separately.

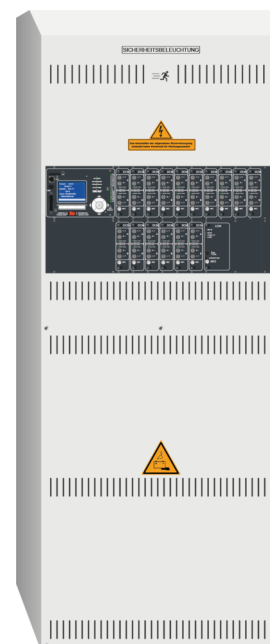

### TECHNICAL DATA

Slots 19"	7
No. of included mains circuits	12
Charging unit included	Yes
SAM module included	Yes
IO module included	Yes
CCIF included	Yes
Networked	Yes
Conncection Substation/Subdistribution	No
Battery compartment included	Yes
Max. load 1h	1500 W
Max. load 3h	500 W
Max. load 8h	300 W
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Output voltage AC	230 V
Output voltage DC	216 V
Material	Steel sheet
Colour	RAL 7035



Mechanical rating IP	20
Protection class	1
Length	230 mm
Width	571 mm
Height	1,470 mm
Customs tariff number	85371098
Coutry of origin	Germany

## ACCESSORIES

- DCM12E - electric circuit unit DCM 2 x circuit 3A (T5A)
- PRUEFBUCH-BELEUCHTUNGSANLAGEN - Test book for safety lighting systems
- MCT15 - remote display, LCD-plaintext, BUS-connection