




Art.-No.: MNXL122-ELS miniControl XL plus LPS, 11xDCM12-E, CCIF, SAM

MAX. 32 MAINS CIRCUITS / 1.500 W, 1H / 640 LUMINAIRES

The Low Power System miniControl XL plus closes with a maximum output of 1.500 W the gap between the smaller powered miniControl XL plus and the big brother midiControl plus. Through the principle of decentralization per fire compartment, similar to a single battery system, there will be no costs for E30-powerlines and their installation. The miniControl XL plus is installed in an operating room in each fire compartment.

Batteries are not included and have to be ordered separately.

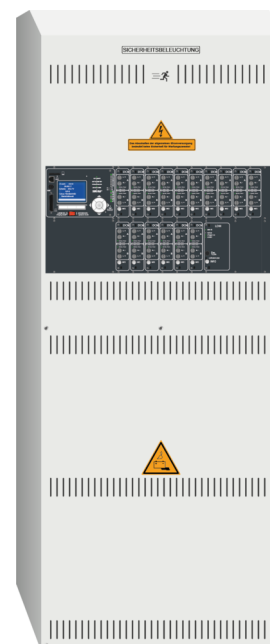

TECHNICAL DATA

Slots 19"	12
No. of included mains circuits	22
Charging unit included	Yes
SAM module included	Yes
IO module included	Yes
CCIF included	Yes
Networked	Yes
Connnection Substation/Subdistribution	No
Battery compartment included	Yes
Max. load 1h	1500 W
Max. load 3h	500 W
Max. load 8h	300 W
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Output voltage AC	230 V
Output voltage DC	216 V
Material	Steel sheet
Colour	RAL 7035



Mechanical rating IP	20
Protection class	1
Length	230 mm
Width	571 mm
Height	1,470 mm
Customs tariff number	85371098
Coutry of origin	Germany

ACCESSORIES

- DCM12E - electric circuit unit DCM 2 x circuit 3A (T5A)
- PRUEFBUCH-BELEUCHTUNGSANLAGEN - Test book for safety lighting systems
- MCT15 - remote display, LCD-plaintext, BUS-connection