



**Art.-Nr: PFD011-EHE**  
**Exit sign Self-contained**  
**Surface mounting, Without monitoring, 1 h, 24 m, IP65,**  
**Polycarbonate, White**

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/PFD011-EHE](http://www.rp-group.com/en/item/PFD011-EHE)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Self-contained
Monitoring	Without monitoring
Bridging time	1 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	66,1 W
Power maintained	4,5 W



Power non-maintained	0,35 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	1.05
Weight incl. packaging	1.18
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	300 lm
Customs tariff number	94056120
GTIN	4260682144720



## TECHNICAL DRAWING

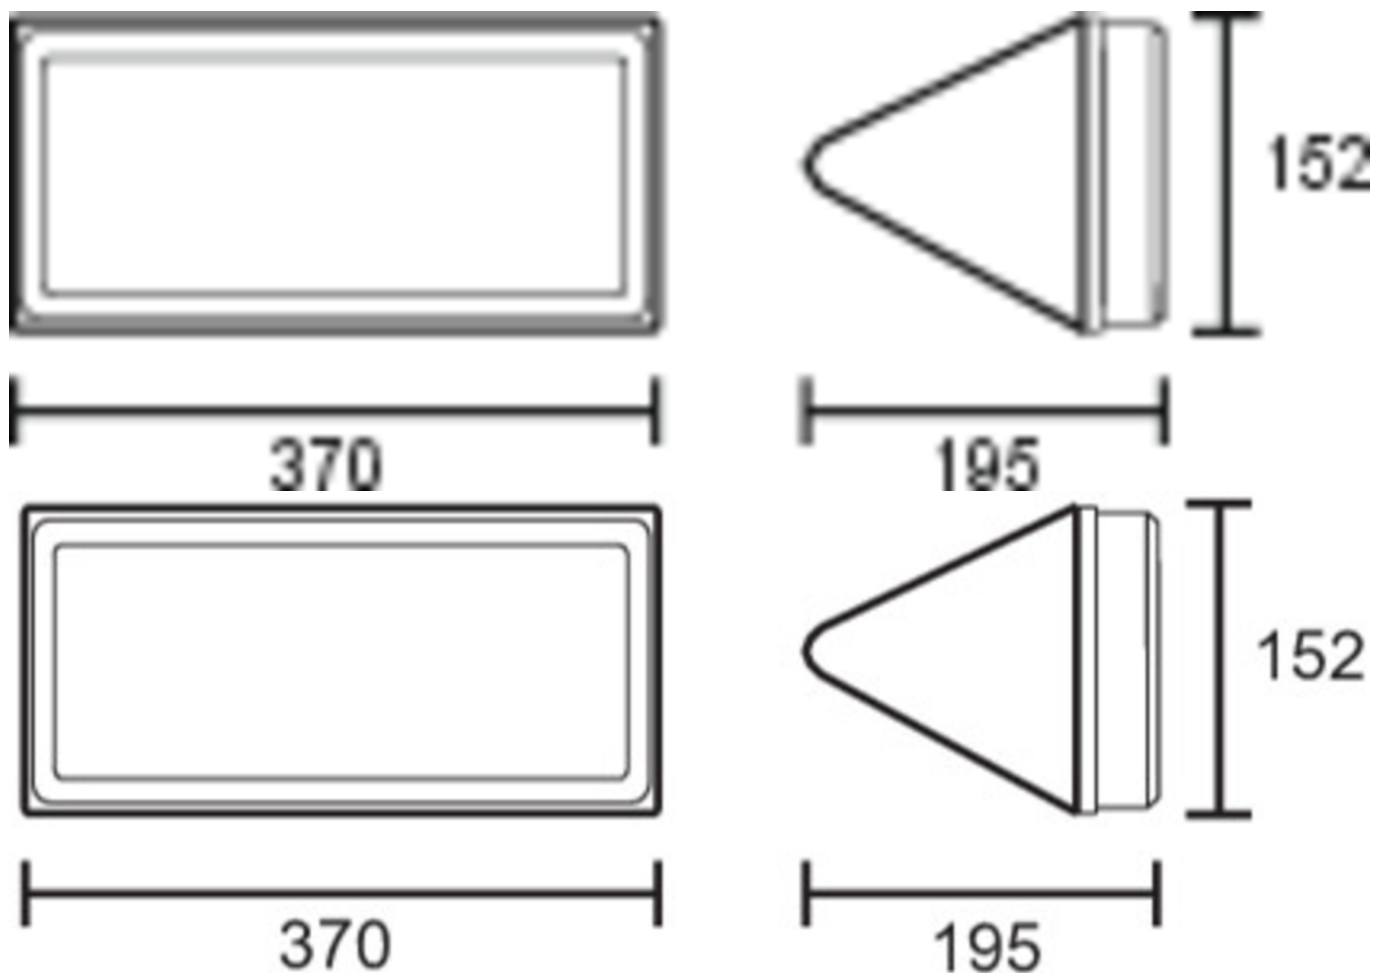







## ACCESSORY LIST

2PW-EB - Pendant  
2DW-EB -  
DSA - Wire suspension  
PFER -  
NIMHHT4820Q - Battery



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
PFD011		Without monitoring		RAL 9003						
PFD011-COOLIP54		Without monitoring		RAL 9003						
PFD011SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
PFD011SC-COOLIP54		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
PFD011SC-EHE		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
PFD411WL		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 24.06.2025 - Subject to technical changes and errors.