



Exit sign

Art.-No.: PFD013WL-EHE

Plastic luminaire for the marking and lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. For single or double sided labeling. Available for central power systems or as self-contained emergency luminaire.

With a built-in heating element (EHE) with 65 watts, this luminaire can be operated in an extended temperature range up to -15 ° C temperature.




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Ceiling mounted
Viewing distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Colour	RAL 9003
Mechanical rating IP	65
Impact resistance IK	6
Protection class	1
Supply	Single battery
Monitoring	WL - Wireless Professional
Operation time	3 h
Battery	12V/0,8Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Input Voltage DC	- V
Power consumption max.	67,5 W
Power consumption maintained	7,5 W
Power consumption non-maintained	3,6 W
Ambient temperature maintained mode	-15 °C / 40 °C
Ambient temperature non-maintained mode	-15 °C / 40 °C
Length	152 mm



Width	370 mm
Height	195 mm
Weight	1.23 kg
Weight incl. Packaging	1.36 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	No
Battery connector	Clamp
Dimming function	Yes
Luminous flux mains mode	150 lm
Luminous flux emergency mode	150 lm
Customs tariff number	94056120
Country of origin	Germany
EAN	4260659563134

TECHNICAL DRAWING

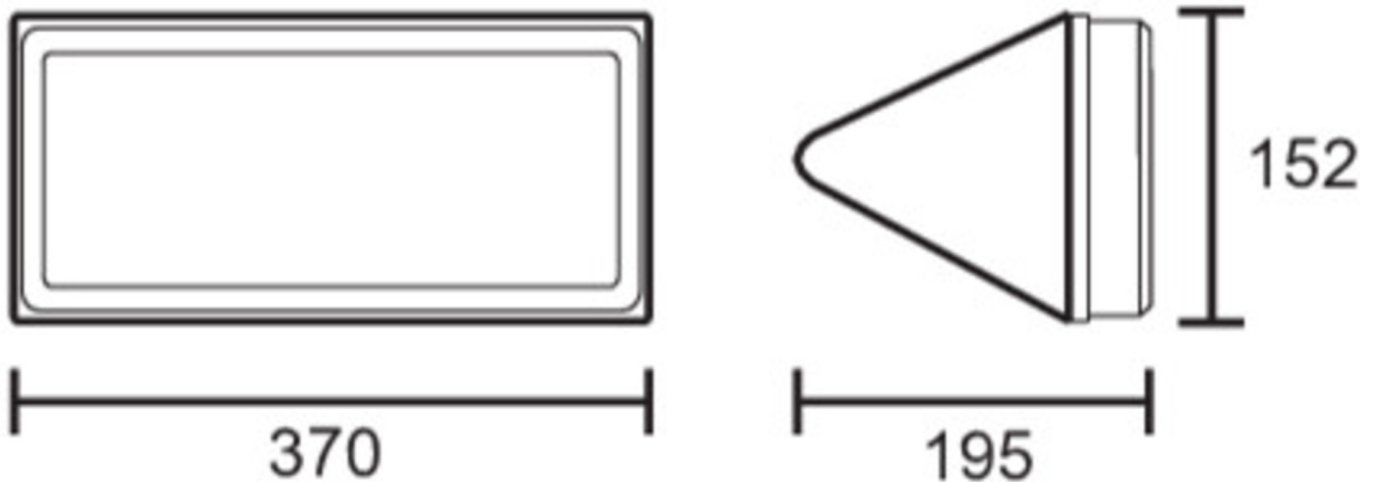

ACCESSORIES

- 2PW-EB -
- 2DW-EB -
- DSA - cord suspension set 1,5m
- PFER - PF recessed frame for wall / ceiling