



Art.-Nr: PFD413WL Exit sign Self-contained Surface mounting, Wireless Professional (WL), 3 h, 24 m, IP65, Polycarbonate, White

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.







More information www.rp-group.com/en/item/PFD413WL



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 6,4 V/1,2 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	230 V
Input frequency	50 Hz
Power max.	5,3 W
Power maintained	4,3 W






Power non-maintained	0,7 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	152 mm				
Width	370 mm				
Height	195 mm				
Weight	1.07				
Weight incl. packaging	1.2				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Luminous flux mains	305 lm				
Luminous flux emergency	180 lm				
Customs tariff number	94056120				
EAN	4260766552052				





TECHNICAL DRAWING

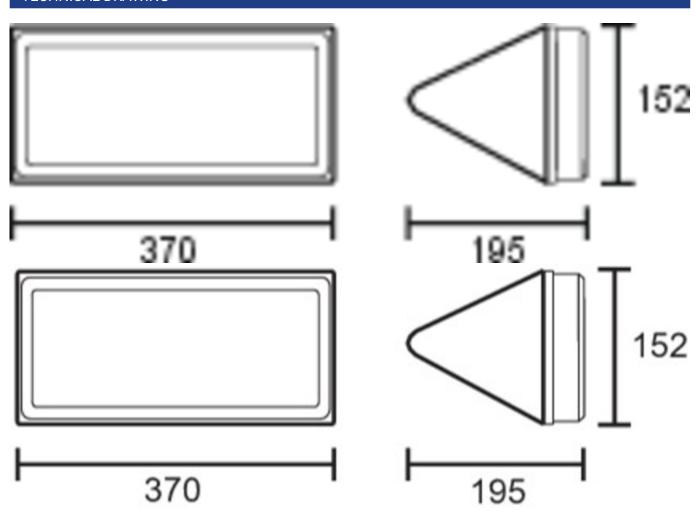

ACCESSORY LIST

2PW-EB - Pendant

2DW-EB -

DSA - Wire suspension

PFER -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
PFD013		Without monitoring		RAL 9003						
PFD013-C00- LIP54		Without monitoring		RAL 9003						
PFD013-EHE		Without monitoring		RAL 9003						
PFD013SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
PFD013SC- COOLIP54		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
PFD013SC- EHE		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
PFD013WL		Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
PFD013WL- EHE		Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
PFD023SC- EHE		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself

As of: 16.04.2025 - Subject to technical changes and errors.