



**Art.-Nr: PFD418SC-TT**  
**Exit sign Self-contained**  
**Surface mounting, SelfControl (SC), 8 h, 24 m, IP65,**  
**Polycarbonate, White**

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/PFD418SC-TT](http://www.rp-group.com/en/item/PFD418SC-TT)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 6,4 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltageAC	180 V - 250 V
Input frequency	50 Hz
Power max.	5 W
Power maintained	3,8 W



Power non-maintained	2 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	1.08
Weight incl. packaging	1.21
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	150 lm
Luminous flux emergency	150 lm
Customs tariff number	94056120
EAN	4262483025512



## TECHNICAL DRAWING

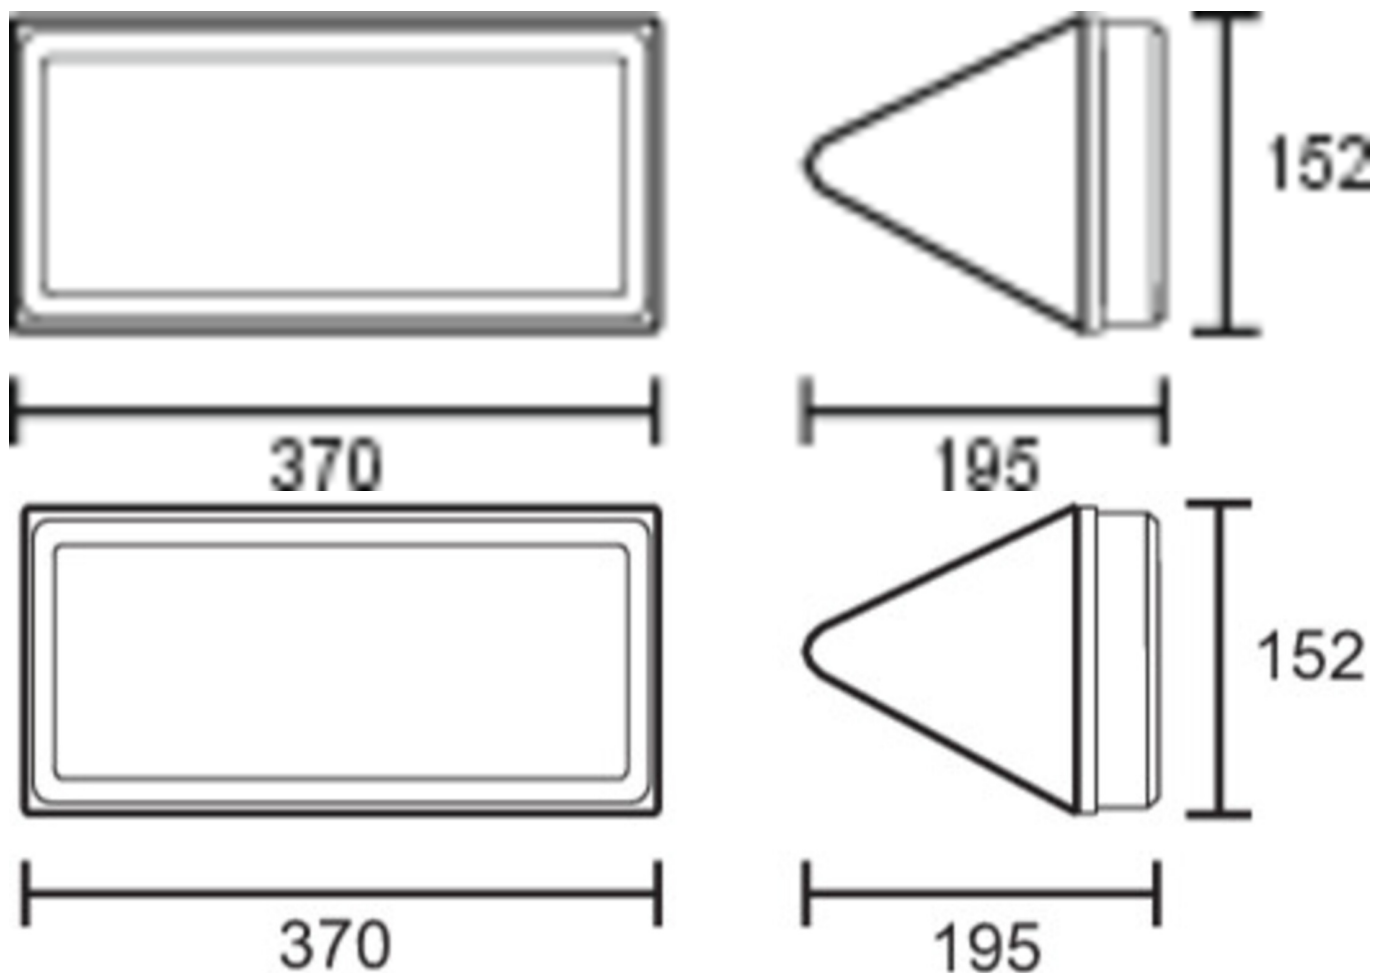

## ACCESSORY LIST

2PW-EB - Pendant  
2DW-EB -  
DSA - Wire suspension  
PFER -

As of: 25.04.2025 - Subject to technical changes and errors.