



Art.-Nr: PFD529CC

Exit sign Centralised power supply systems

Recessed mounting, CoreCompact 24 (CC), CPS, 24 m, IP65, Plastic, white

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/PFD529CC




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	24 m
Pictograph	Set
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	5,1 W
Power DS	5,1 W
Power BS	0,4 W
Ambient temperature DS	-20 °C to 40 °C



Ambient temperature BS	-20 °C to 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	0.85
Weight incl. packaging	0.98
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Customs tariff number	94056120
EAN	4260682157515

TECHNICAL DRAWING

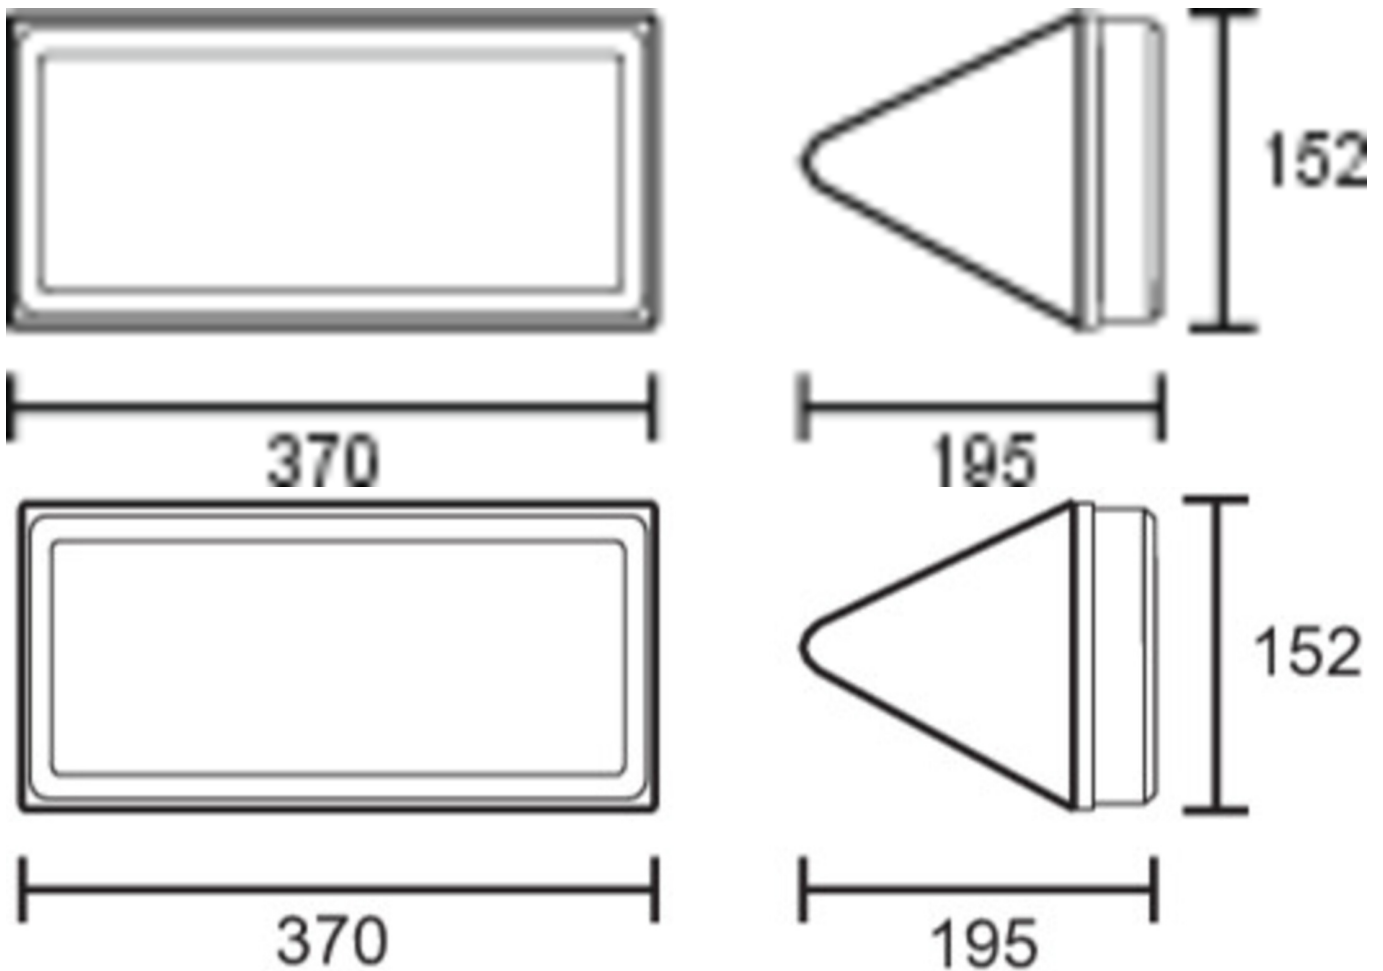



ACCESSORY LIST

2PW-EB - Pendant
2DW-EB -
DSA - Wire suspension
PFER -

As of: 21.01.2025 - Subject to technical changes and errors.