



## Exit sign

**Art.-No.: PFW011WL-EHE**

Plastic luminaire for the marking and lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. For single or double sided labeling. Available for central power systems or as self-contained emergency luminaire.

With a built-in heating element (EHE) with 65 watts, this luminaire can be operated in an extended temperature range up to -15 ° C temperature.




## TECHNICAL DATA

|   |                                |
|---|--------------------------------|
| Luminaire type                          | Exit sign                      |
| Mounting                                | Wall mounted                   |
| Viewing distance                        | 24 m                           |
| Pictograph                              | Set                            |
| Illuminant                              | LED                            |
| Housing material                        | Polycarbonate                  |
| Colour                                  | RAL 9003                       |
| Mechanical rating IP                    | 65                             |
| Impact resistance IK                    | 5                              |
| Protection class                        | 1                              |
| Supply                                  | Single battery                 |
| Monitoring                              | WL - Wireless Professional     |
| Operation time                          | 1 h                            |
| Battery                                 | 12V/0,8Ah NiMH                 |
| Operation mode                          | maintained/non-maintained mode |
| Input Voltage AC                        | 230 V                          |
| Input Frequency Hz                      | 50 / 60 Hz                     |
| Input Voltage DC                        | - V                            |
| Power consumption max.                  | 67,5 W                         |
| Power consumption maintained            | 7,5 W                          |
| Power consumption non-maintained        | 3,6 W                          |
| Ambient temperature maintained mode     | -15 °C / 40 °C                 |
| Ambient temperature non-maintained mode | -15 °C / 40 °C                 |
| Length                                  | 370 mm                         |



|                              |               |
|------------------------------|---------------|
| Width                        | 105 mm        |
| Height                       | 152 mm        |
| Weight                       | 1.25 kg       |
| Weight incl. Packaging       | 1.38 kg       |
| Connection cross-section     | 2.5 mm        |
| Switching input L'           | Yes           |
| Emergency light blocking     | No            |
| Battery connector            | Clamp         |
| Dimming function             | Yes           |
| Luminous flux mains mode     | 150 lm        |
| Luminous flux emergency mode | 150 lm        |
| Customs tariff number        | 94056120      |
| Coutry of origin             | Germany       |
| EAN                          | 4260659563189 |

## TECHNICAL DRAWING

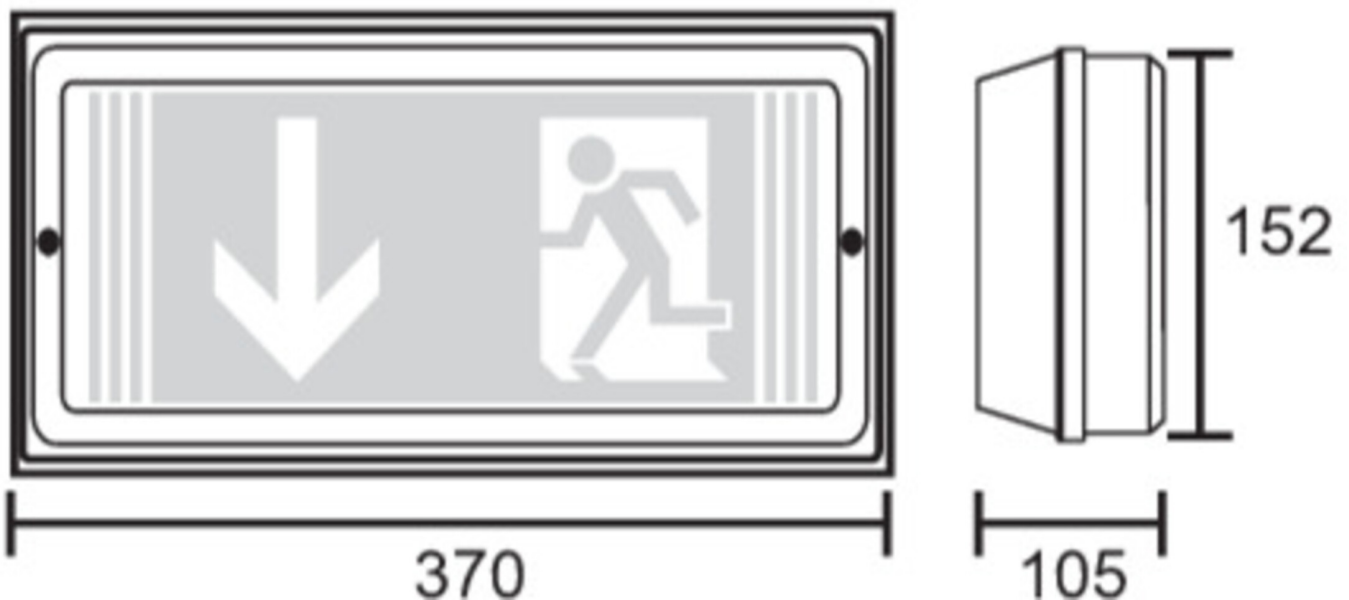

## ACCESSORIES

BALL2 - Ball protection (8W) 450x280x125mm