



**Art.-Nr: PFW423SC-P**  
**Emergency light Self-contained**  
**Universal, SelfControl (SC), 3 h, 24 m, IP65, Polycarbonate,**  
**White**

Robust plastic emergency exit sign or safety luminaire.

Use as an emergency exit sign luminaire for wall mounting.

Or without the use of pictograms as a safety luminaire with the prismatic cover included, preferably for ceiling mounting.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

[www.rp-group.com/en/item/PFW423SC-P](http://www.rp-group.com/en/item/PFW423SC-P)



## TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 6,4 V/3,3 Ah
Operating mode	Non-maintained / maintained



Input voltageAC	180 V - 250 V
Input frequency	50 Hz
Power max.	8,2 W
Power maintained	7 W
Power non-maintained	2 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	370 mm
Width	105 mm
Height	152 mm
Weight	1.13
Weight incl. packaging	1.26
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
EAN	4260766556623



## TECHNICAL DRAWING

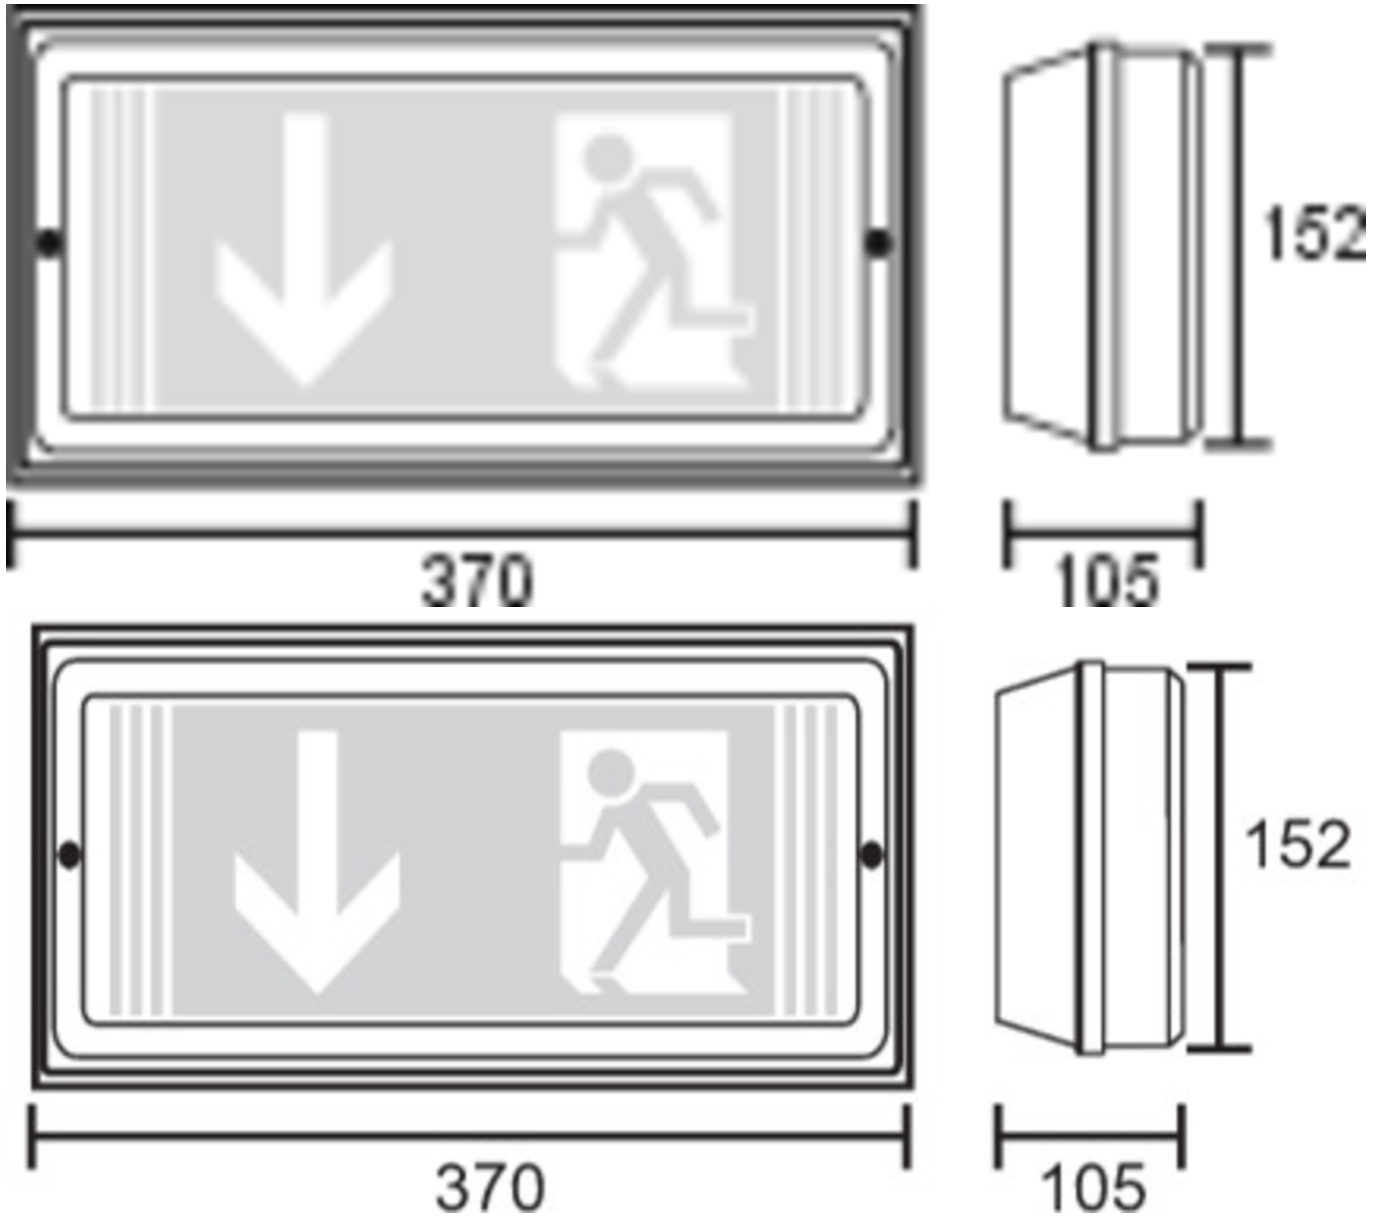

## ACCESSORY LIST

BALL2 - Wire mesh guard

As of: 29.04.2025 - Subject to technical changes and errors.