



**Art.-Nr: PMW039**

**Emergency light Centralised power supply systems  
Universal, Without monitoring, CPS, , IP65, Polycarbonate,  
White**

Plastic safety luminaire with convex shaped surround.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The luminaire can be mounted by fitting on the wall and ceiling as well as fitting in the ceiling in conjunction with the mounting frame available.

The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

[www.rp-group.com/en/item/PMW039](http://www.rp-group.com/en/item/PMW039)



**TECHNICAL DATA**


Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign, TÜV Rheinland Type approved, ENEC, HACCP
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz



Input voltage DC	100-254 V
Power max.	9 W
Power maintained	9 W
Power non-maintained	0 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.64
Weight incl. packaging	0.77
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	780 lm
Luminous flux emergency	780 lm
Customs tariff number	94056120
GTIN	4260766551789



## TECHNICAL DRAWING

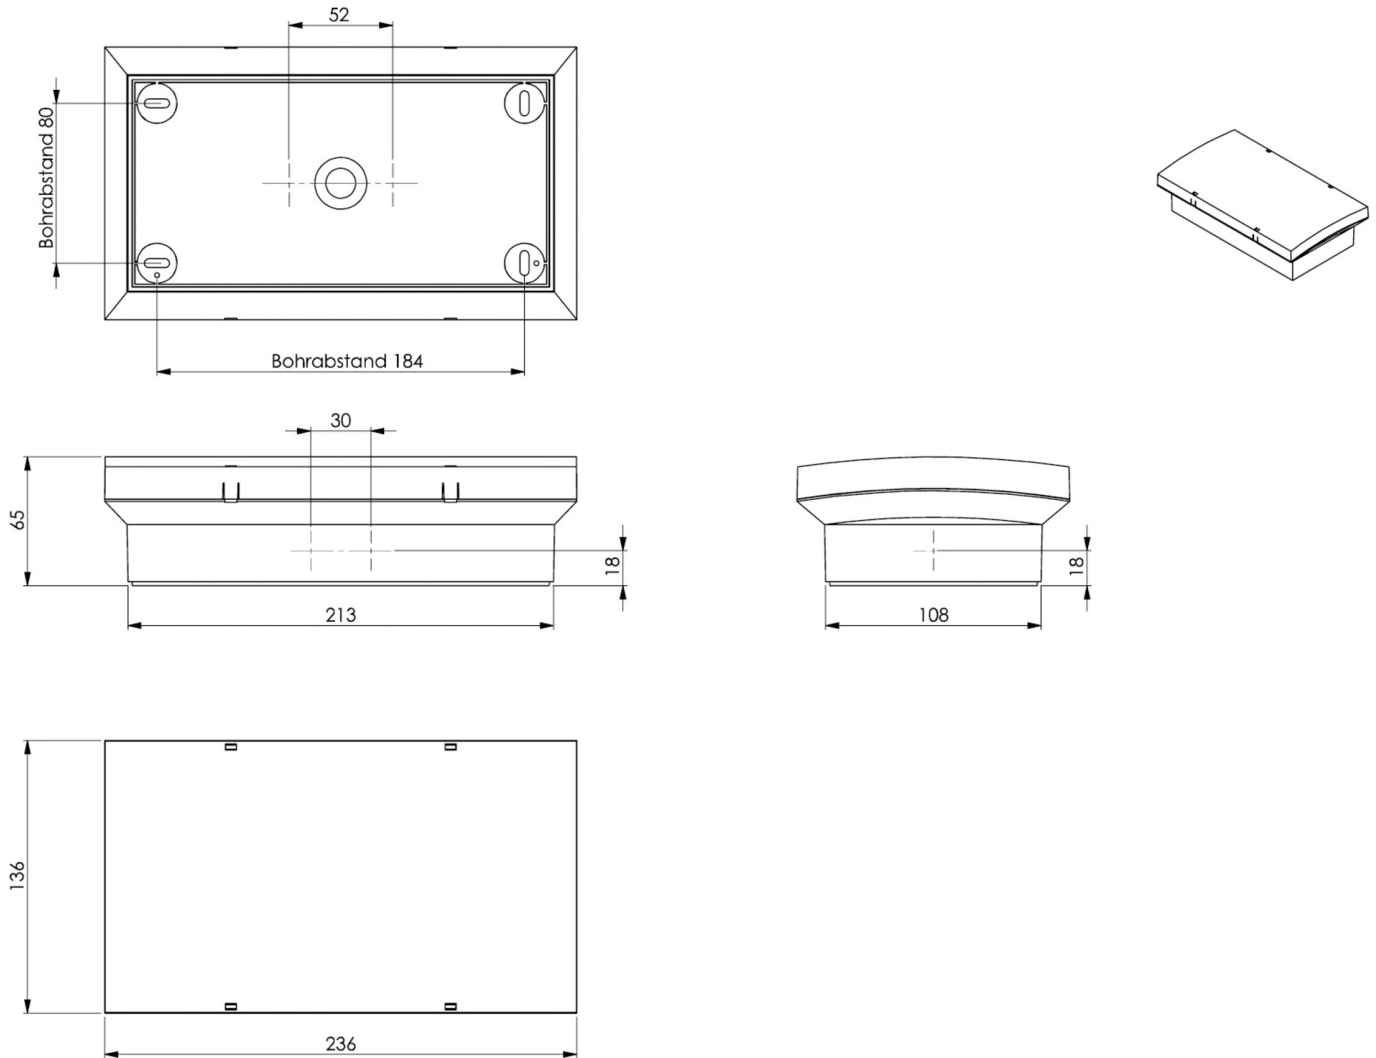

## ACCESSORY LIST

PME -  
LSYS-B4 -  
LSYS-F4 -  
LSYS-H4 -  
LSYS-R4 -  
LSYS-S4 -  
LSYS-WF4 -

As of: 15.12.2025 - Subject to technical changes and errors.