



Art.-Nr: PMW529CC


**Emergency light Centralised power supply systems
Universal, CoreCompact 24 (CC), CPS, , IP65, Polycarbonate,
White**

Plastic safety luminaire with convex shaped surround.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The luminaire can be mounted by fitting on the wall and ceiling as well as fitting in the ceiling in conjunction with the mounting frame available.

Control and monitoring via central 24 V low-power system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.

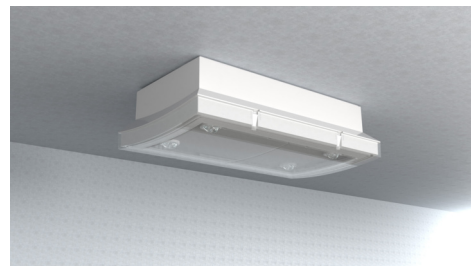

More information

www.rp-group.com/en/item/PMW529CC



TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign, HACCP
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltageAC	24 V
Power max.	5,1 W



Power maintained	5,1 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.63
Weight incl. packaging	0.76
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
EAN	4260766552014



TECHNICAL DRAWING

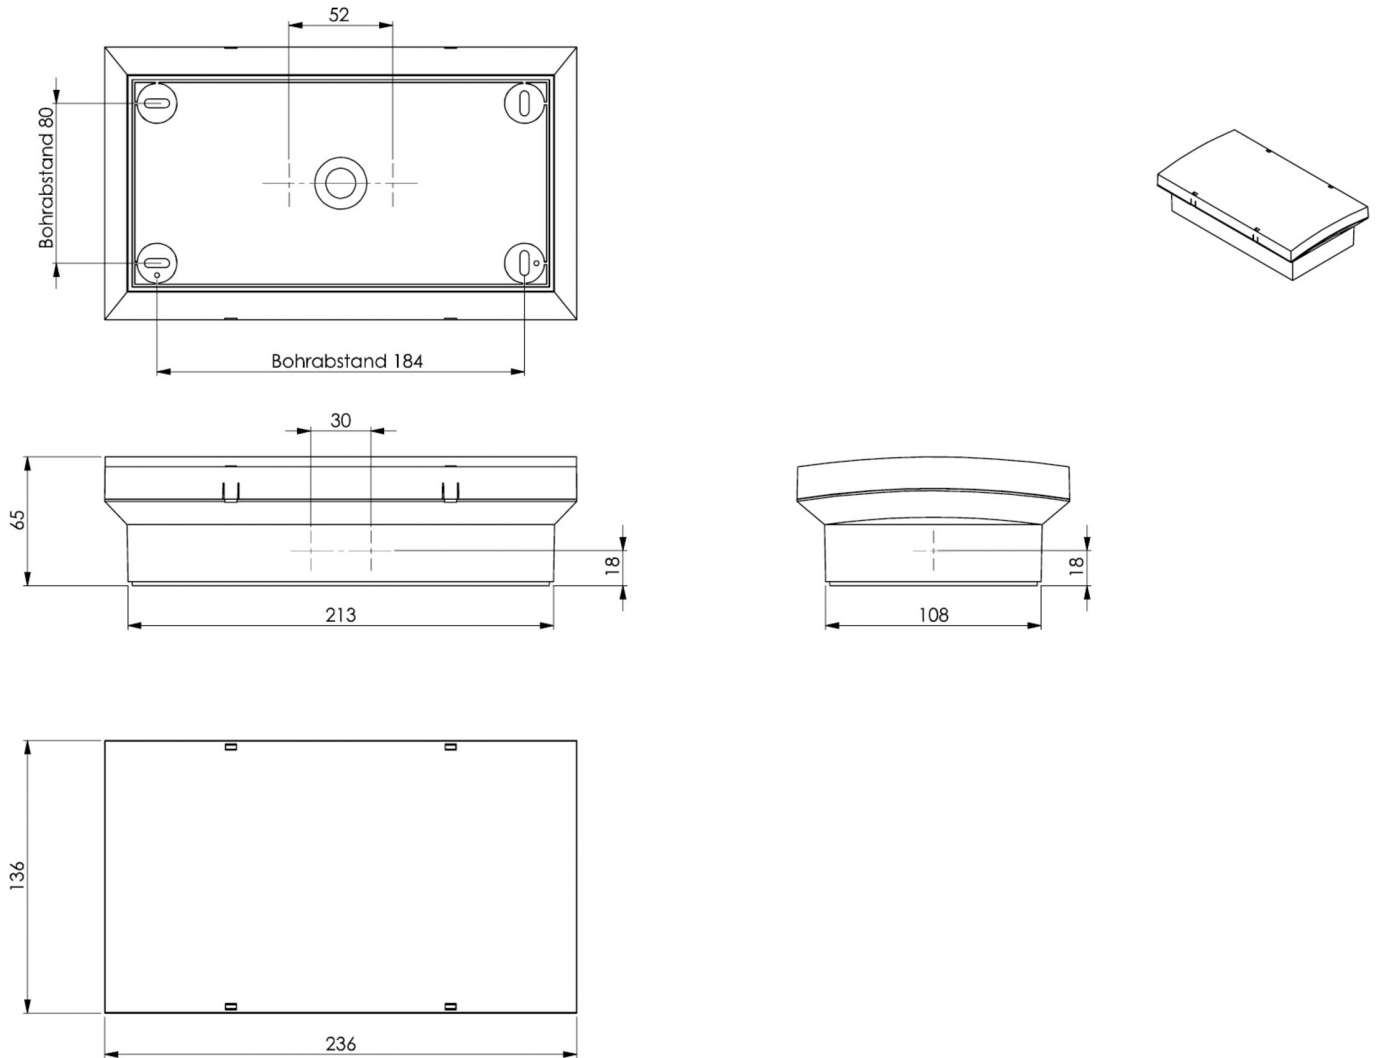

ACCESSORY LIST

LSYS-B4 -
LSYS-F4 -
LSYS-H4 -
LSYS-R4 -
LSYS-S4 -
LSYS-WF4 -

As of: 29.04.2025 - Subject to technical changes and errors.