



**Art.-Nr: PXDL039**

**Surface mounting, CPS, IP65, PCABS, Polycarbonate, White, Flexiklick**

Robust plastic emergency light with a high protection rating in a linear design for versatile use.

Suitable for maintained or non maintained mode.

The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information  
[www.rp-group.com/en/item/PXDL039](http://www.rp-group.com/en/item/PXDL039)



**TECHNICAL DATA**


Luminaire type	Emergency light
Mounting	Surface mounting
Pictograph	No
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	WEEE, CE, D-Sign
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	9 W



Power maintained	9 W
Power non-maintained	0 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	73 mm
Width	339 mm
Height	71 mm
Weight	0.64
Weight incl. packaging	0.74
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	780 lm
Luminous flux emergency	780 lm
Customs tariff number	94056120
GTIN	4262483026656



## TECHNICAL DRAWING

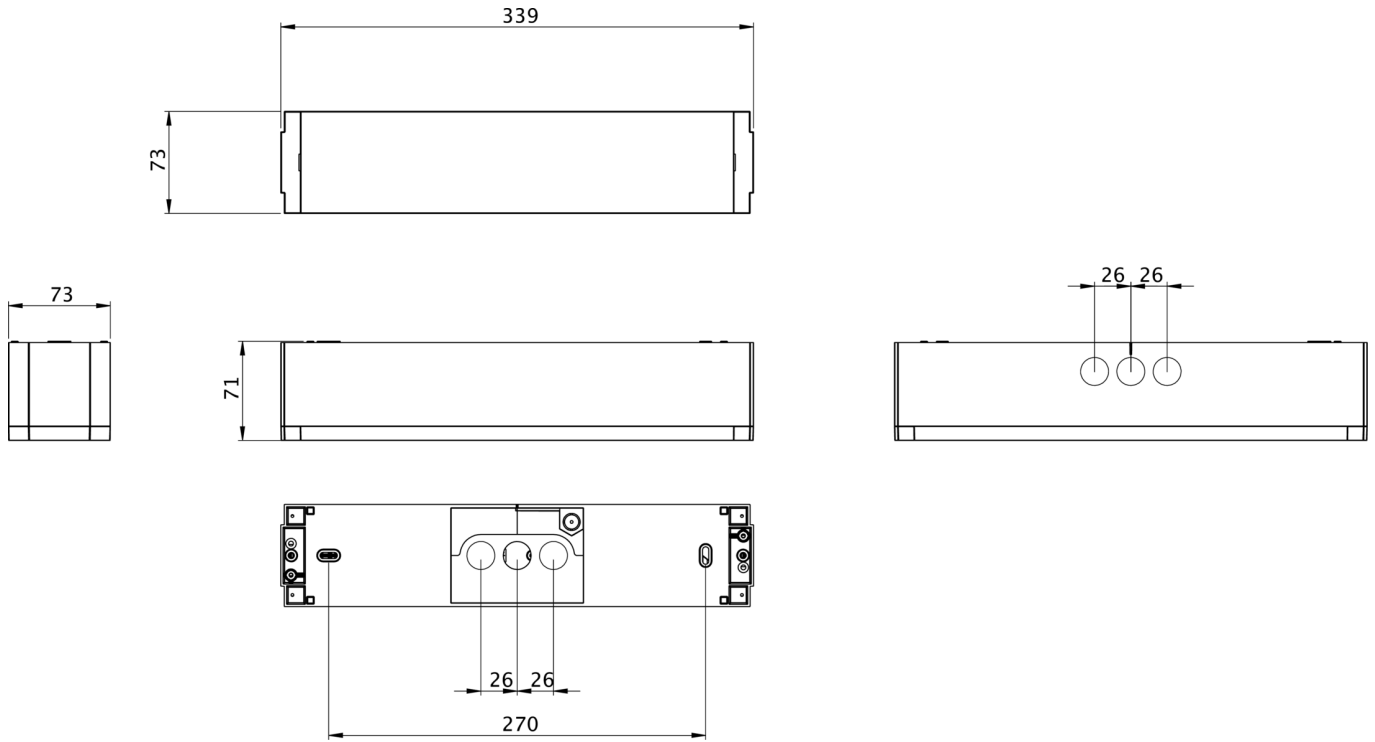

## ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

As of: 04.06.2026 - Subject to technical changes and errors.