



Art.-Nr: PXDL421WL

Surface mounting, 1 h, IP65, PCABS, Polycarbonate, White, Flexiklick

Robust plastic emergency light with a high protection rating in a linear design for versatile use.

Suitable for maintained or non maintained mode.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information
www.rp-group.com/en/item/PXDL421WL



TECHNICAL DATA


| | |
|------------------------|-----------------------------|
| Luminaire type | Emergency light |
| Mounting | Surface mounting |
| Pictograph | No |
| Illuminant | LED |
| Housing material | PCABS, Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 8 |
| Certification | WEEE, CE, D-Sign |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,2 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 Hz |
| Power max. | 6,3 W |



| | |
|---|---------------------|
| Power maintained | 5,2 W |
| Power non-maintained | 0,8 W |
| Ambient temperature maintained mode | 0 °C to 40 °C |
| Ambient temperature non-maintained mode | 0 °C to 40 °C |
| Depth | 73 mm |
| Width | 339 mm |
| Height | 71 mm |
| Weight | 0.74 |
| Weight incl. packaging | 0.84 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Luminous flux mains | 460 lm |
| Luminous flux emergency | 460 lm |
| Customs tariff number | 94056120 |
| GTIN | 4262483026618 |



TECHNICAL DRAWING

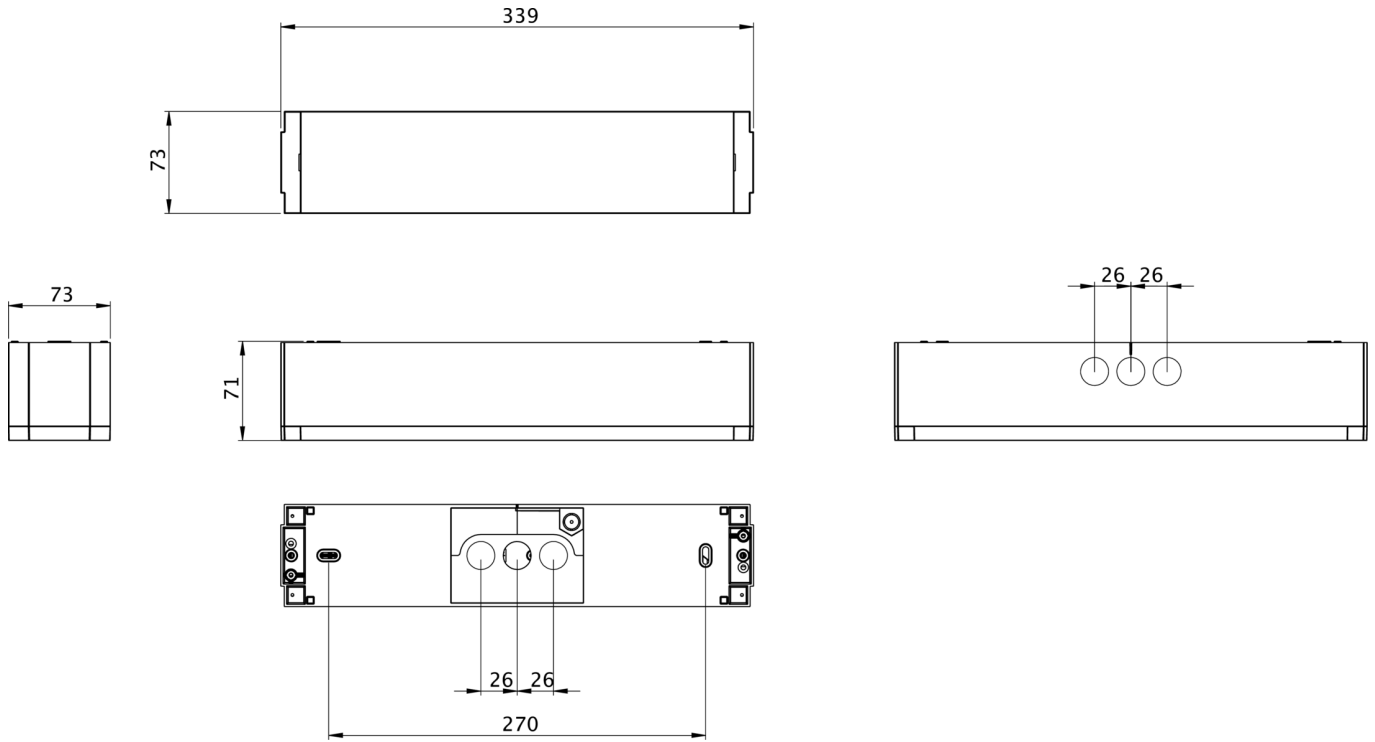

ACCESSORY LIST

- PXD-AW - Parallel wall bracket for the PXD emergency and safety light
- LFPN3212-SET-2AKKU - Battery

As of: 04.06.2026 - Subject to technical changes and errors.