



## Art.-Nr: PXDL423SC

### Surface mounting, 3 h, IP65, PCABS, Polycarbonate, White, Flexiklick

Robust plastic emergency light with a high protection rating in a linear design for versatile use.

Suitable for maintained or non maintained mode.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

[www.rp-group.com/en/item/PXDL423SC](http://www.rp-group.com/en/item/PXDL423SC)



#### TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Surface mounting
Pictograph	No
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	WEEE, CE, D-Sign
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 250 V
Input frequency	50 Hz
Power max.	6,8 W
Power maintained	5,2 W



Power non-maintained	0,8 W
Ambient temperature maintained mode	0 °C to 40 °C
Ambient temperature non-maintained mode	0 °C to 40 °C
Depth	73 mm
Width	339 mm
Height	71 mm
Weight	0.78
Weight incl. packaging	0.88
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4262483026595



## TECHNICAL DRAWING

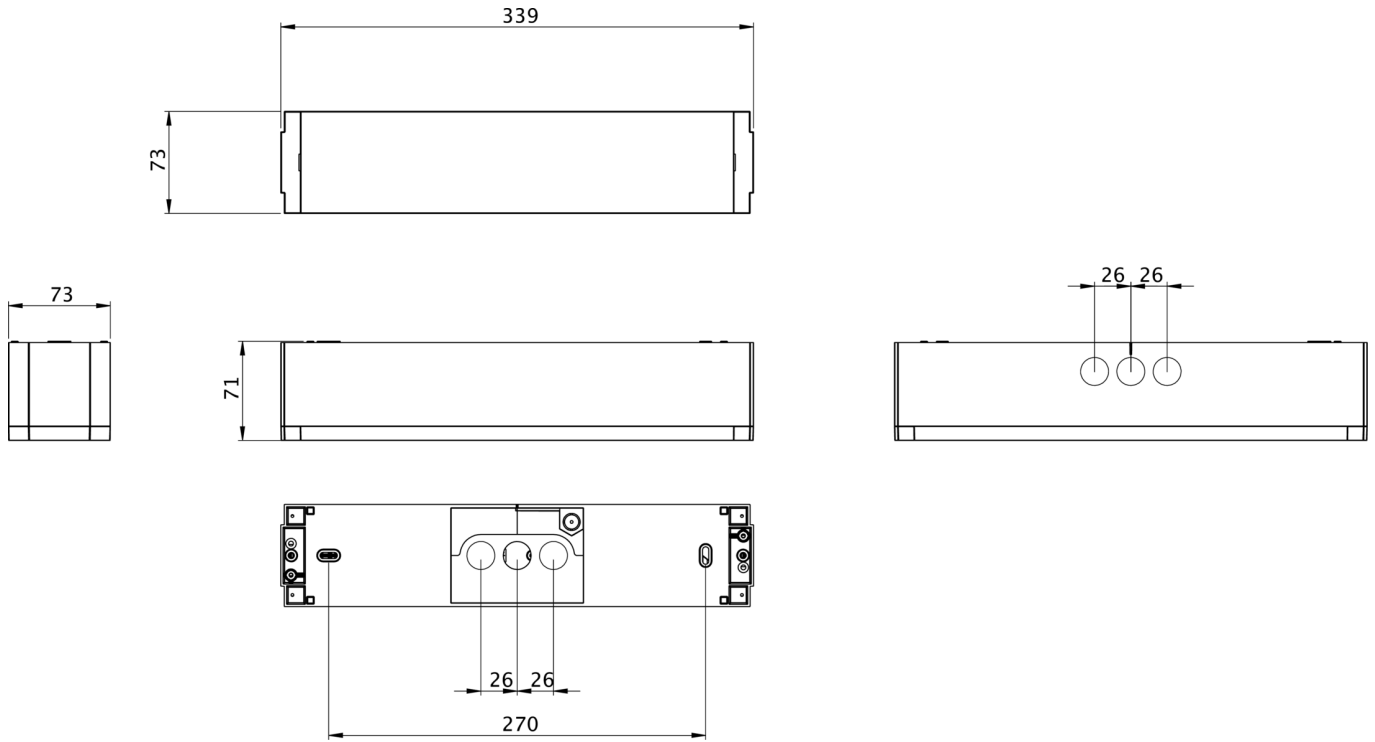

## ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

As of: 04.06.2026 - Subject to technical changes and errors.