



Art.-Nr: PXDL529CC

Surface mounting, CPS, IP65, PCABS, Polycarbonate, White, Flexiklick

Robust plastic emergency light with a high protection rating in a linear design for versatile use.

Suitable for maintained or non maintained mode.

Control and monitoring via central 24 V low-power system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

www.rp-group.com/en/item/PXDL529CC




TECHNICAL DATA

| | |
|------------------------|----------------------------------|
| Luminaire type | Emergency light |
| Mounting | Surface mounting |
| Pictograph | No |
| Illuminant | LED |
| Housing material | PCABS, Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 8 |
| Certification | WEEE, CE, D-Sign |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | CoreCompact 24 (CC) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 24 V |
| Power max. | 5,1 W |
| Power maintained | 5,1 W |
| Power non-maintained | 0,4 W |



| | |
|---|---------------------|
| Ambient temperature maintained mode | -20 °C to 50 °C |
| Ambient temperature non-maintained mode | -20 °C to 50 °C |
| Depth | 73 mm |
| Width | 339 mm |
| Height | 71 mm |
| Weight | 0.63 |
| Weight incl. packaging | 0.73 |
| Connection cross-section | 2.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Luminous flux mains | 520 lm |
| Luminous flux emergency | 520 lm |
| Customs tariff number | 94056120 |
| GTIN | 4262483026649 |

TECHNICAL DRAWING

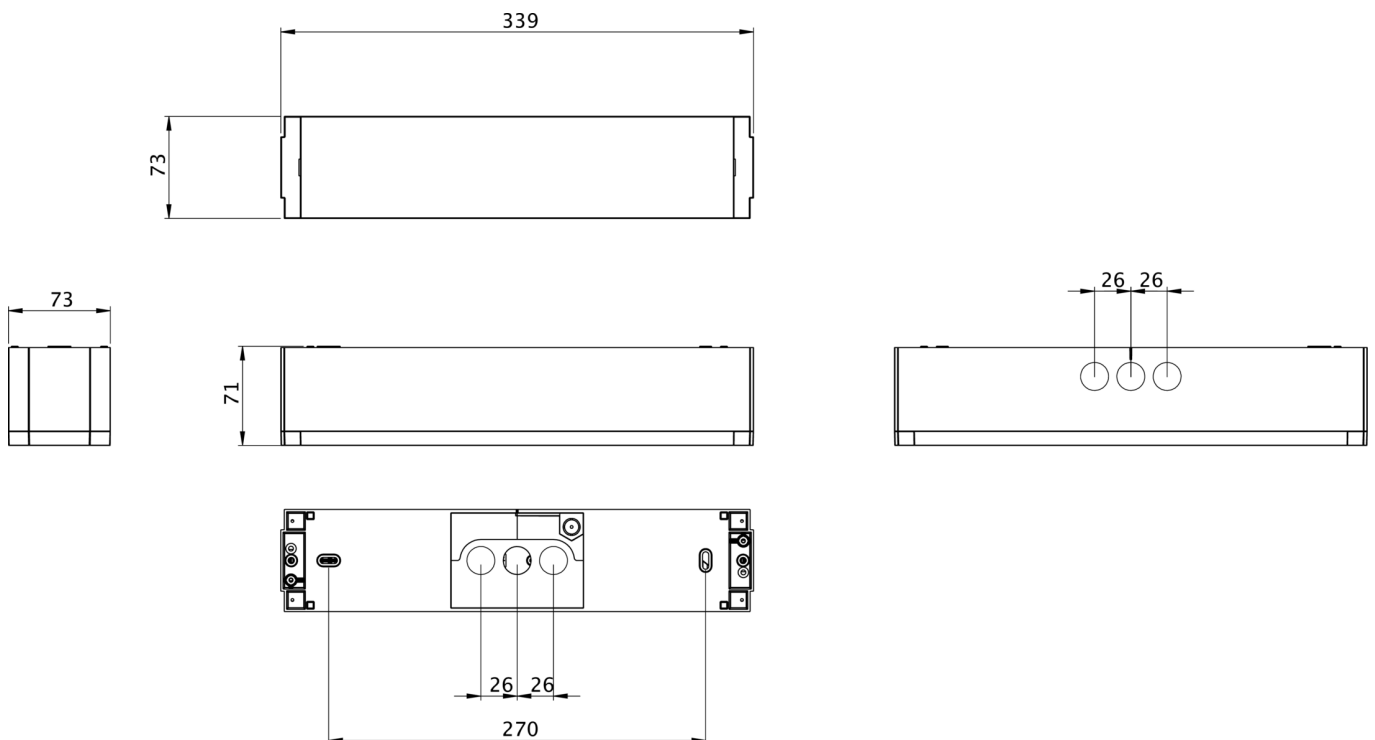



ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

As of: 04.06.2026 - Subject to technical changes and errors.